Specifications

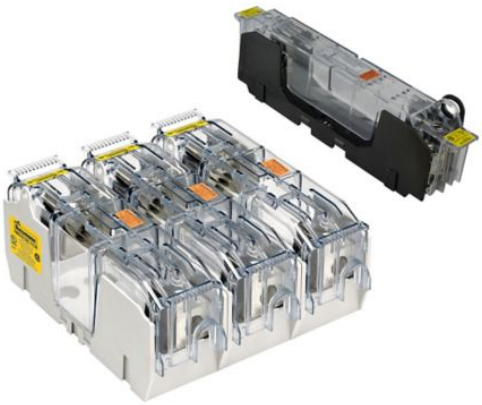


Photo is representative

Eaton HM25060-2SCR

Eaton Bussmann series HM modular fuse block, CR, 60 A, Two-pole, 120, Celsius, -40, Celsius, Screw, 75 °C, Thermoplastic base, Tin-plated aluminum terminals, 250 V

General specifications

PRODUCT NAME	Eaton Bussmann series HM modular fuse block
CATALOG NUMBER	HM25060-2SCR
UPC	051712697699
PRODUCT LENGTH/DEPTH	4.2 in
PRODUCT HEIGHT	2.24 in
PRODUCT WIDTH	2.66 in
PRODUCT WEIGHT	0.3 lb
WARRANTY	Not Applicable
COMPLIANCES	RoHS Compliant
CERTIFICATIONS	UL Listed CSA Certified

Powering Business Worldwide

Electrical rating

AMPERAGE RATING	60 A
VOLTAGE RATING	250 V

Physical details

CONDUCTOR MATERIAL RATED FOR	Both
MATERIAL	Tin-plated aluminum terminals Thermoplastic base
NUMBER OF POLES	Two-pole
OPERATING TEMPERATURE - MAX	120 °C
OPERATING TEMPERATURE - MIN	-40 °C

General information

CONNECTION	Screw
SPECIAL FEATURES	CR

Resources

CATALOGS	Bussmann series complete full line catalog no. 1007 HM25060-2SCR~FUSE BLOCK, CLASS H, 250V 60A, 2 POLE
MULTIMEDIA	Bussmann series Fuseology Class H(K), J and R Power distribution fuse block overview
SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - HM25060-2SCR

PROJECT NAME:	
PROJECT NUMBER:	
PREPARED BY:	
DATE:	

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.