B3092 - Adjustable Pipe Saddle Support with Yoke

Size Range: 3/4" (20mm) thru 36" (900mm) pipe

Material: Steel with cast iron reducer


Function: Designed to support horizontal pipe from floor stanchion where vertical adjustment is required. U-bolt and hex nuts are provided to hold pipe securely to saddle. To complete floor stanchion, use with B3088T threaded pipe stand.

Approvals: Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 38 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 37.

Finish: Plain. Contact customer service for alternative finishes and materials.

Order By: Part number and finish

Notes: Order with B3088T for complete stanchion support. 4" (100) thru 12" (300) fits both steel and ductile iron pipe. For other ductile iron pipe sizes specify B3092DI - size. 3" (80) Ductile Iron uses B3092-3 1/2
Not available for 36" (900) ductile iron pipe size

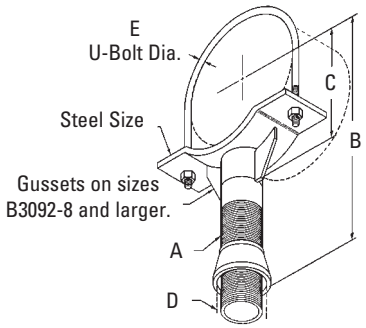

A
Schedule 40 Pipe Size

B
Center of pipe to
bottom of pipe reducer.

C
Center of pipe to
bottom lip of support.

D
Nominal pipe size of base stand -
Figure B3088T, not included.

E
U-Bolt Dia.




	Pipe Size		Maximum		A		B Minimum		B Maximum	
Part No.	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
B3092-3/4	3/4"	(19)	1 3/8"	(34.9)	3/4"	(19)	5 3/4"	(146.0)	10 1/4"	(260.3)
B3092-1	1"	(25)	1 3/8"	(34.9)	3/4"	(19)	5 29/32"	(150.0)	10 13/32"	(264.3)
B3092-1 1/4	1 1/4"	(32)	1 11/16"	(42.9)	3/4"	(19)	6 5/64"	(154.4)	10 37/64"	(268.7)
B3092-1 1/2	1 1/2"	(38)	2"	(50.8)	3/4"	(19)	6 1/4"	(158.7)	10 3/4"	(273.0)
B3092-2	2"	(50)	2 7/16"	(61.9)	3/4"	(19)	6 7/16"	(163.5)	10 15/16"	(277.8)
B3092-2 1/2	2 1/2"	(65)	2 7/8"	(73.0)	1 1/2"	(40)	6 7/8"	(174.6)	11 3/8"	(288.9)
B3092-3	3"	(80)	3 1/2"	(88.9)	1 1/2"	(40)	7 3/16"	(182.6)	11 11/16"	(296.9)
B3092-3 1/2	3 1/2"	(90)	4"	(101.6)	1 1/2"	(40)	7 7/16"	(188.9)	11 15/16"	(303.2)
B3092-4	4"	(100)	4 7/8"	(123.8)	2 1/2"	(65)	7 13/16"	(198.4)	12 5/16"	(312.7)
B3092-5	5"	(125)	5 5/8"	(142.9)	2 1/2"	(65)	8 9/32"	(210.3)	12 25/32"	(324.6)
B3092-6	6"	(150)	6 29/32"	(175.4)	2 1/2"	(65)	9 1/16"	(230.2)	13 9/16"	(344.5)
B3092-8	8"	(200)	9 1/8"	(231.8)	2 1/2"	(65)	10 1/2"	(266.7)	15"	(381.0)
B3092-10	10"	(250)	11 3/32"	(281.8)	2 1/2"	(65)	11 9/16"	(293.7)	16 1/16"	(408.0)
B3092-12	12"	(300)	13 3/16"	(334.9)	2 1/2"	(65)	12 9/16"	(319.1)	17 1/16"	(433.4)
B3092-14	14"	(350)	14"	(355.6)	3"	(80)	14 5/16"	(363.5)	18 13/16"	(477.8)
B3092-16	16"	(400)	16"	(406.4)	3"	(80)	15 5/16"	(388.9)	19 13/16"	(503.2)
B3092-18	18"	(450)	18"	(457.2)	4"	(100)	17 5/16"	(439.7)	21 13/16"	(554.0)
B3092-20	20"	(500)	20"	(508.0)	4"	(100)	18 5/16"	(465.1)	22 13/16"	(579.4)
B3092-24	24"	(600)	24"	(609.6)	4"	(100)	20 5/16"	(515.9)	24 13/16"	(630.2)
B3092-30	30"	(750)	30"	(762.0)	4"	(100)	24 7/16"	(620.7)	28 15/16"	(735.0)
B3092-36	36"	(900)	36"	(914.4)	4"	(100)	27 7/16"	(696.9)	31 15/16"	(811.2)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

B3092 - Adjustable Pipe Saddle Support with Yoke cont.



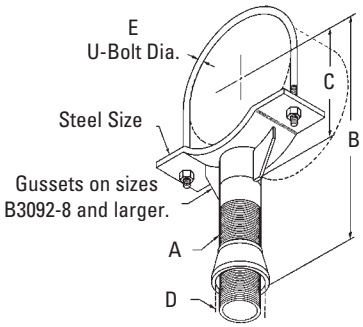

A
Schedule 40 Pipe Size

B
Center of pipe to bottom of pipe reducer.

C
Center of pipe to bottom lip of support.

D
Nominal pipe size of base stand - Figure B3088T, not included.

E
U-Bolt Dia.

Part No.	C in.	C (mm)	D in.	D (mm)	E in.	E (mm)	Saddle Steel Size in.	Saddle Steel Size (mm)	Approx. Wt./100 Lbs.	Approx. Wt./100 (kg)
B3092-3/4	2"	(50.8)	1 1/2"	(38)	1/4"	(6.4)	1/4" x 1 1/2"	(6.3 x 38.1)	247	(112.0)
B3092-1	2 5/32"	(54.8)	1 1/2"	(38)	1/4"	(6.4)	1/4" x 1 1/2"	(6.3 x 38.1)	257	(116.6)
B3092-1 1/4	2 21/64"	(59.1)	1 1/2"	(38)	3/8"	(9.5)	1/4" x 2"	(6.3 x 50.8)	289	(131.1)
B3092-1 1/2	2 1/2"	(63.5)	1 1/2"	(38)	3/8"	(9.5)	1/4" x 2"	(6.3 x 50.8)	306	(138.8)
B3092-2	2 11/16"	(68.3)	1 1/2"	(38)	3/8"	(9.5)	1/4" x 2"	(6.3 x 50.8)	326	(147.9)
B3092-2 1/2	3 1/8"	(79.4)	2 1/2"	(65)	1/2"	(12.7)	1/4" x 3"	(6.3 x 76.2)	651	(295.3)
B3092-3	3 7/16"	(87.3)	2 1/2"	(65)	1/2"	(12.7)	1/4" x 3"	(6.3 x 76.2)	716	(324.8)
B3092-3 1/2	3 11/16"	(93.7)	2 1/2"	(65)	1/2"	(12.7)	1/4" x 3"	(6.3 x 76.2)	717	(325.2)
B3092-4	4 1/4"	(107.9)	3"	(80)	1/2"	(12.7)	3/8" x 3 1/2"	(9.5 x 88.9)	1286	(583.3)
B3092-5	4 9/16"	(115.9)	3"	(80)	1/2"	(12.7)	3/8" x 3 1/2"	(9.5 x 88.9)	1321	(599.2)
B3092-6	5 1/2"	(139.7)	3"	(80)	5/8"	(15.9)	1/2" x 3 1/2"	(12.7 x 88.9)	1595	(723.5)
B3092-8	7"	(177.8)	3"	(80)	5/8"	(15.9)	1/2" x 3 1/2"	(12.7 x 88.9)	1815	(823.3)
B3092-10	8"	(203.2)	3"	(80)	3/4"	(19.0)	1/2" x 3 1/2"	(12.7 x 88.9)	2123	(963.0)
B3092-12	9 3/16"	(233.4)	3"	(80)	7/8"	(22.2)	1/2" x 3 1/2"	(12.7 x 88.9)	2546	(1154.8)
B3092-14	10 9/16"	(268.3)	4"	(100)	7/8"	(22.2)	5/8" x 4"	(15.9 x 101.6)	3593	(1629.8)
B3092-16	11 9/16"	(293.7)	4"	(100)	7/8"	(22.2)	5/8" x 4"	(15.9 x 101.6)	3825	(1735.0)
B3092-18	13 9/16"	(344.5)	6"	(150)	1"	(25.4)	3/4" x 5"	(19.0 x 127.0)	7043	(3194.7)
B3092-20	14 9/16"	(369.9)	6"	(150)	1"	(25.4)	3/4" x 5"	(19.0 x 127.0)	7425	(3368.0)
B3092-24	16 9/16"	(420.7)	6"	(150)	1"	(25.4)	1" x 5"	(25.4 x 127.0)	9170	(4159.5)
B3092-30	20 11/16"	(525.5)	6"	(150)	1"	(25.4)	1" x 5"	(25.4 x 127.0)	10787	(4893.0)
B3092-36	23 11/16"	(601.7)	6"	(150)	1"	(25.4)	1" x 5"	(25.4 x 127.0)	12177	(5523.5)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.