Product data sheet

Specifications



30mm Push Button, Type K, selector switch, 3 position, C cam, black knob

9001KS43B

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001K
Product or Component Type	Head for selector switch
Device short name	K
Type of operator	maintained
Operator profile	Black standard knob

Complementary

Bezel material	Metal
Mounting diameter	1.2 in (30 mm)
Operator position information	3 positions
Contacts type and composition	Without contact block
Mechanical durability	0.5 Mcycles
Device presentation	Basic element
Cap/operator or lens colour	Black
Operator profile	Standard handle
Type of operator	Stay put
Size	30 mm
Cam profile	3

Environment

IP Degree of Protection	IP65/IP66
NEMA degree of protection	NEMA 3R/6/13
Product Certifications	CSA LR24590 class 3211 03 CE UL listed file E42259 CCN NKCR

Ordering and shipping details

Category	US10CS121426
Discount Schedule	0CS1
GTIN	785901322634
Returnability	Yes
Country of origin	MX

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.000 in (5.080 cm)
Package 1 Width	2.300 in (5.842 cm)
Package 1 Length	2.800 in (7.112 cm)
Package weight(Lbs)	4.321 oz (122.500 g)
Unit Type of Package 2	S01
Number of Units in Package 2	28
Package 2 Height	5.9 in (15 cm)
Package 2 Width	5.9 in (15 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	8.003 lb(US) (3.630 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	896
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	23.622 in (60.000 cm)
Package 3 Weight	273.726 lb(US) (124.160 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**1 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.3 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**49**
Circularity Profile	End of Life Information
Take-back	**No**

Technical Illustration

Dimensions

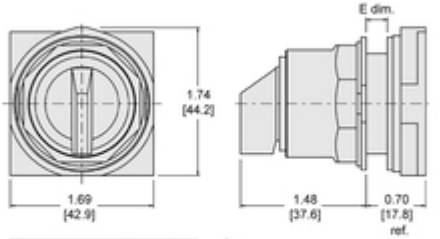

Panel Thickness E dim. in. [mm]	Number of Gasket
1/16 [1.6]	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

in.
[mm]

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative







