Product data sheet

Specifications



Illuminated push button head, Harmony 9001SK, plastic, mushroom 41mm, red, 30mm, 2 positions, push-pull, 110...120V

9001SKR9P1R

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001SK
Product or Component Type	Head for illuminated push-button
Device short name	9001SK
Operator additional information	Screw-on plastic

Complementary

Bezel material	Plastic
Mounting diameter	1.2 in (30 mm)
Contacts type and composition	Without contact block
Mechanical durability	5000000 cycles
Device presentation	Basic element
Cap/operator or lens colour	Red
[Us] rated supply voltage	110...120 V
Light block supply	Via integral transformer
Operator profile	Mushroom Ø 41 mm
Type of operator	Push-pull
Operator position information	2 positions
Supply frequency	50...60 Hz
Size	30 mm
Bulb base	BA 9s
Light source	Incandescent bulb

Environment

Standards	JIS C 4520 UL 508 CSA C22.2 No 14 IEC 60947-5-1 JIS C 852 IEC 60947-1 IEC 60947-5-4
IP Degree of Protection	IP65/IP66
NEMA degree of protection	NEMA 3R/4X/13

Ordering and shipping details

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US10CS121429
Discount Schedule	0CS1
GTIN	785901043089
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.900 in (4.826 cm)
Package 1 Width	2.200 in (5.588 cm)
Package 1 Length	3.700 in (9.398 cm)
Package weight(Lbs)	6.560 oz (185.973 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**4 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**1 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**2 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.2 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	Compliant
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**15**
Circularity Profile	End of Life Information
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Offer Marketing Illustration

Product benefits / Features

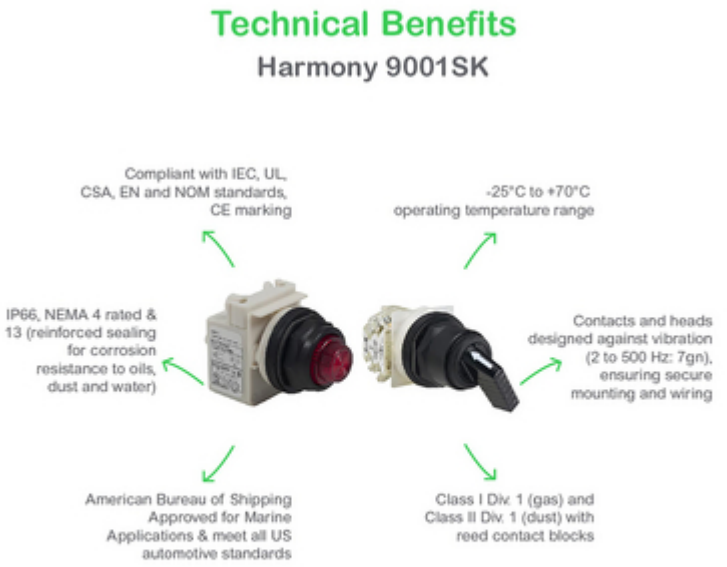

Offer Marketing Illustration

Product benefits / Features

