Product data sheet

Specifications



discrete input module Modicon Quantum - 32 I 24 V DC

140DDI35300

Discontinued on: Dec 31, 2022

To be end-of-service on: Dec 31, 2030

Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Low voltage dc discrete input modules
Discrete input number	32

Complementary

Group of channels	4
Logic input	Positive (sink)
Discrete input voltage	24 V DC
Input voltage limits	19.2...30 V
Voltage state 1 guaranteed	15...30 V DC
Voltage state 0 guaranteed	-3...5 V DC
Current state 1 guaranteed	>= 2 mA at Us = 5.5 V and Uin = 0 V
Current state 0 guaranteed	<= 0.5 mA
Addressing requirement	2 input words
Input impedance	2500 Ohm
Maximum leakage current	200 mA at Us = 5.5 V and Uin = 4 V
Absolute maximum input	30 V continuous 56 V during 1.3 ms decaying pulse
Response Time	<= 1 ms from state 0 to state 1 <= 1 ms from state 1 to state 0
Protection Type	Input protection by resistor limited
Power dissipation	1.7 W + (0.36 x number of points on)
Isolation between group and bus	1780 Vrms for 1 minute
Isolation between group	500 Vrms for 1 minute
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 32 LEDs (green) for input status
Marking	CE
Bus current requirement	330 mA
Module format	Standard
Product Weight	0.7 lb(US) (0.3 kg)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Standards	CSA C22.2 No 142 UL 508
Product Certifications	C-tick DNV RINA RMRS BV GOST ABS
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80…2000 MHz IEC 801-3
Ambient Air Temperature for Operation	32…140 °F (0…60 °C)
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
GTIN	3595861133815
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.83 in (4.65 cm)
Package 1 Width	6.48 in (16.45 cm)
Package 1 Length	12.19 in (30.97 cm)
Package weight(Lbs)	14.4 oz (409.2 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension

Repair	No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

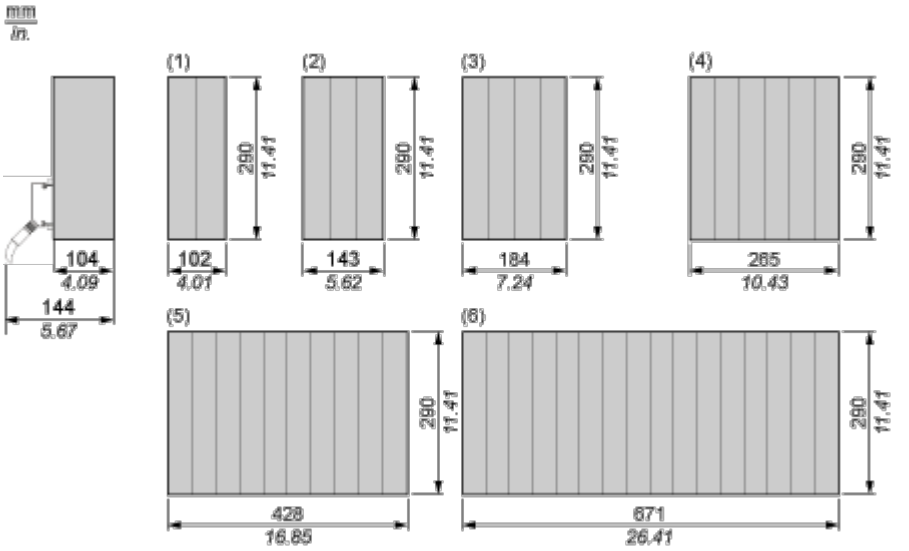

(1) 2 slots

(2) 3 slots

(3) 4 slots

(4) 6 slots


(5) 10 slots

(6) 16 slots

Connections and Schema

24 Vdc Discrete Input Sink Module

Wiring Diagram

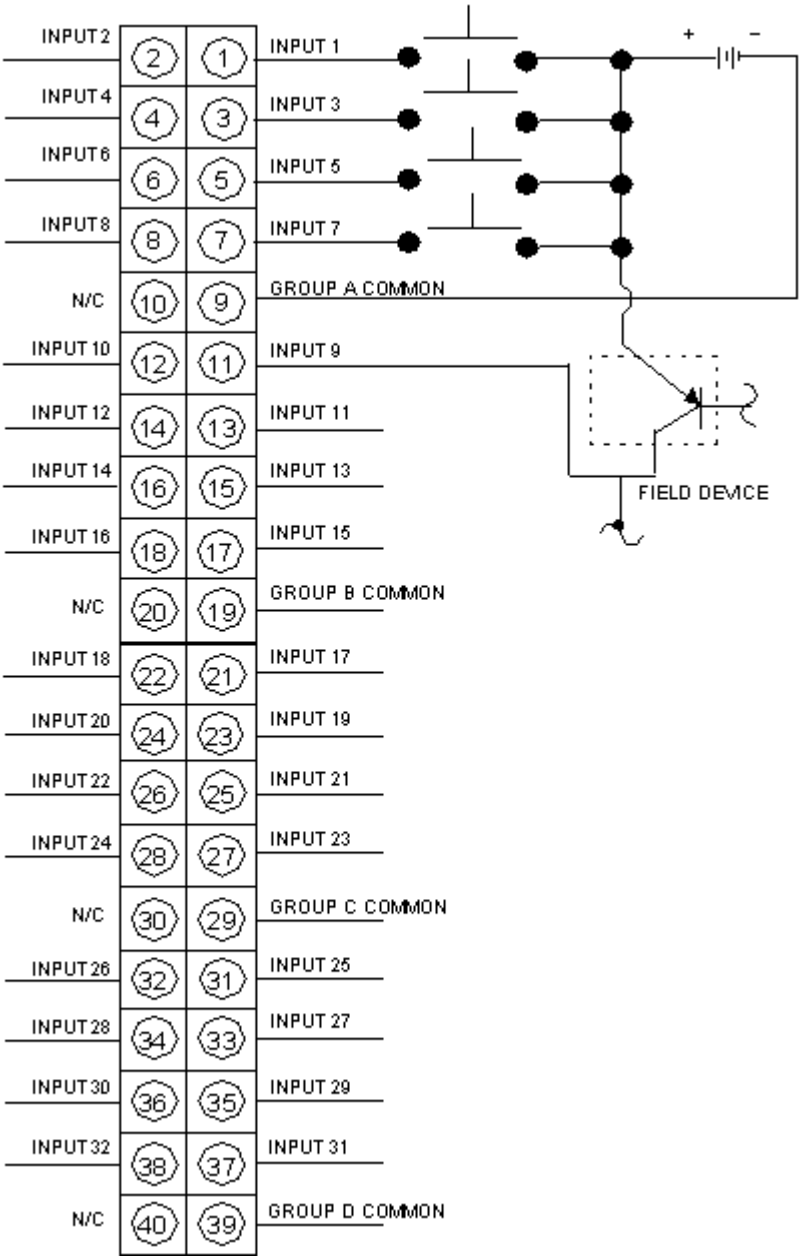

N/C Not Connected