Product data sheet

Specifications



Discontinued - Service only

power supply module Modicon Quantum - 120..230 V AC - standalone

140CPS11100

Discontinued on: Dec 31, 2022

To be end-of-service on: Dec 31, 2030

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Power supply module
Power supply type	Standalone

Complementary

Input voltage	120...230 V 100...276 V) AC 47…63 Hz
Input current	200 mA 230 V 400 mA 115 V
Inrush current	10 A 230 V 20 A 115 V
rated power in VA	50 VA
Associated fuse rating	1.5 A, slow-blow
Harmonic distortion	<= 10 % of fundamental rms value
Output voltage	5.1 V DC
Power supply output current	3 A standalone
Output overvoltage protection	Internal
Output overload protection	Internal
Power dissipation	2 + (3 x Iout) where Iout is in A
Local signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module format	Standard
Product Weight	1.43 lb(US) (0.65 kg)

Environment

Standards	UL 508 CSA C22.2 No 142
Product Certifications	cUL FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80…2000 MHz IEC 801-3

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature for Operation	32…140 °F (0…60 °C)
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
GTIN	3595861135208
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.4 in (16.3 cm)
Package 1 Width	1.8 in (4.5 cm)
Package 1 Length	12.3 in (31.2 cm)
Package weight(Lbs)	23.5 oz (665.0 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

SCIP Number	B9f7af54-f48c-4264-b9ca-0abb9b59c3ab
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension

Repair	No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

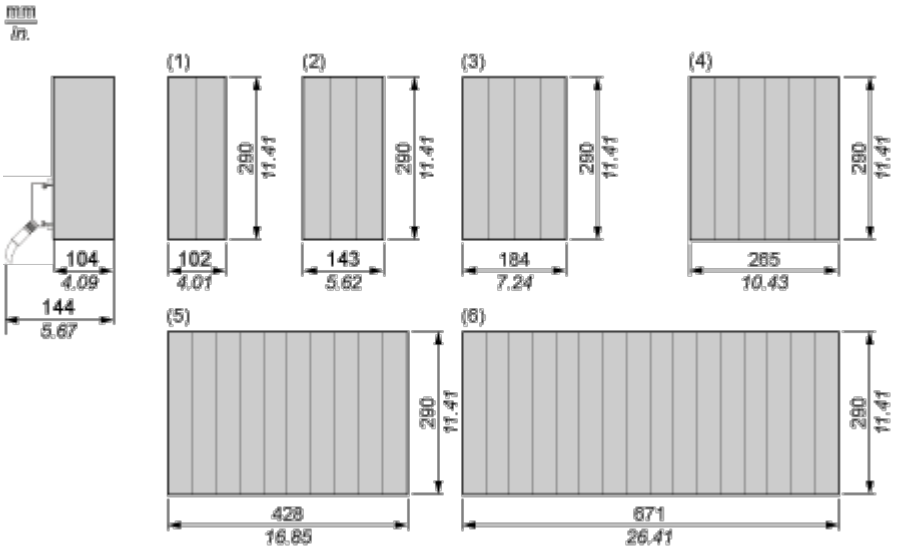

(1) 2 slots

(2) 3 slots

(3) 4 slots

(4) 6 slots

(5) 10 slots

(6) 16 slots

Connections and Schema

115/230 Vac, 3 A Power Supply Module

Wiring Diagram

