Product data sheet

Specifications



relay discrete output module Modicon Quantum - 8 O

140DRC83000

Discontinued on: Dec 31, 2022

To be end-of-service on: Dec 31, 2030

Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Relay discrete output module
Discrete output number	8

Complementary

Contacts type and composition	1 NO/NC
Contact form	Form C
Discrete output voltage	20...250 V AC 30...150 V DC 5...30 V DC
Addressing requirement	0.5 output word
Maximum load current	100 mA 30...50 V DC L/R = 10 ms 2 A 250/30 V AC/DC tungsten 1/4 hp cos phi = 0.4 3 A 250/30 V AC/DC 300 mA 30...50 V DC resistive 5 A 250/30 V AC/DC resistive 140 °F (60 °C)
Surge current	20 A 10 ms capacitive
Switching frequency	30 Hz resistive F = 0.5/I²L inductive
Switching capacity in VA	1250 VA resistive
Maximum response time on input open	10 ms at state 0 to state 1 20 ms at state 1 to state 0
Mechanical durability	10000000 cycles
Electrical durability	100000 cycles 100 mA 30...150 V DC L/R = 10 ms 100000 cycles 30...150 V DC interposing relay 100000 cycles 300 mA 30...150 V DC resistive 100000 cycles 5 A 30 V DC resistive 200000 cycles 5 A 250 V AC resistive 50000 cycles 500 mA 30...150 V DC resistive
Output overvoltage protection	Internal by varistor, 275 V
Isolation between channels	1780 Vrms AC for 1 minute 2500 V DC
Isolation between channels and bus	1780 Vrms AC for 1 minute 2500 V DC for 1 minute
Power dissipation	2.75 W + (0.5 x the number of points on)
Marking	CE

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 8 LEDs (green) for input status
Bus current requirement	560 mA
Module format	Standard
Product Weight	0.7 lb(US) (0.3 kg)

Environment

Product Certifications	C-tick GOST GL RMRS FM Class 1 Division 2 ABS DNV RINA
Standards	UL 508 CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80…2000 MHz IEC 801-3
Ambient Air Temperature for Operation	32…140 °F (0…60 °C)
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
GTIN	3595861127081
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.4 in (16.3 cm)
Package 1 Width	1.8 in (4.5 cm)
Package 1 Length	12.3 in (31.2 cm)
Package weight(Lbs)	16.8 oz (475.0 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension

Repair	No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

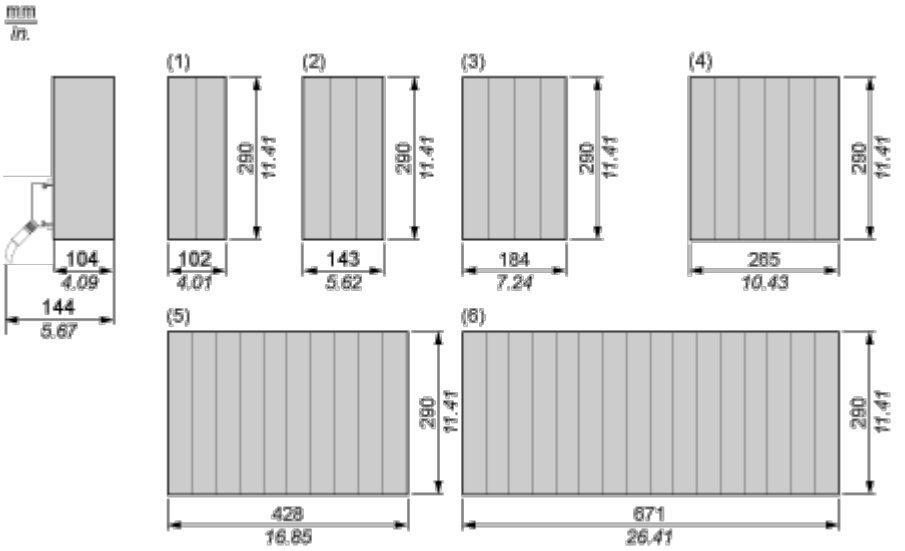

(1) 2 slots

(2) 3 slots

(3) 4 slots

(4) 6 slots


(5) 10 slots

(6) 16 slots

Connections and Schema

Relay Output Normally Open/Normally Closed Module

Wiring Diagram

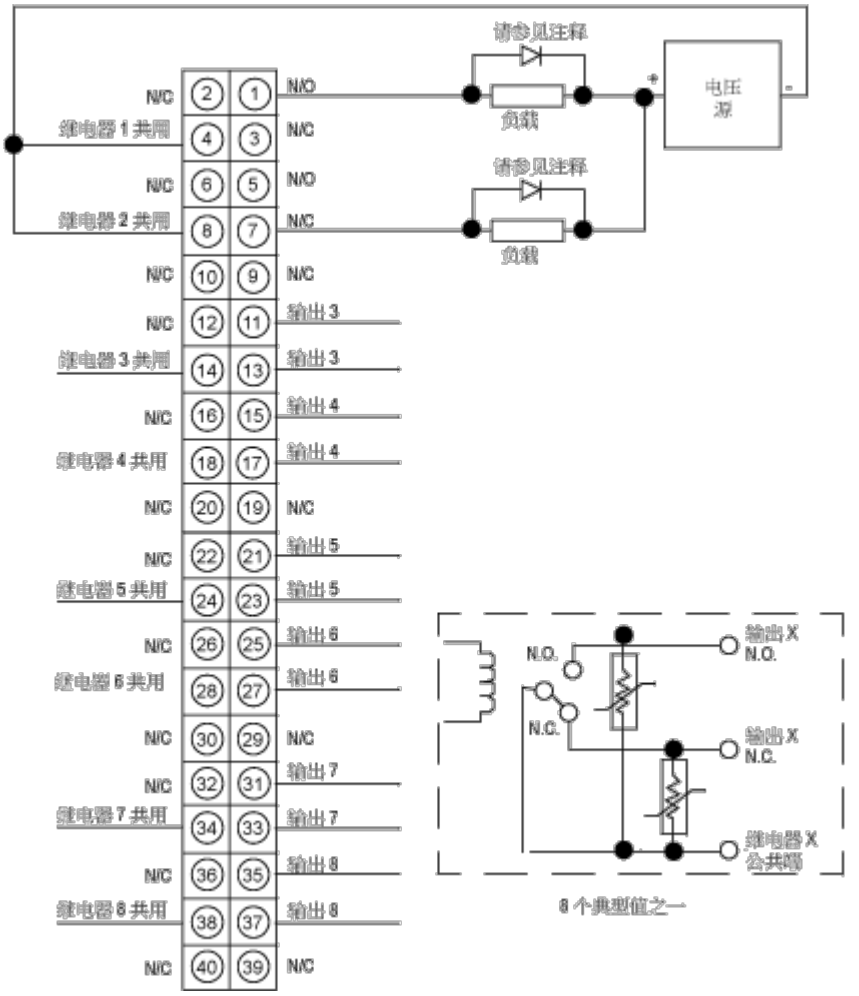

N/C Not Connected

N.O. Normally Open

N.C. Normally Closed