Product data sheet

Specifications



analog output module Modicon Quantum - 8 O multirange

140ACO13000

Discontinued on: Jan 15, 2023

To be end-of-service on: Dec 31, 2030

Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Analogue output module

Complementary

Analogue output number	8
Addressing requirement	8 output words
Loop voltage	6…30 V DC
Maximum voltage drop	<30 V 25 mA
Analogue output range	0...20 mA 0...20000 counts 0...25 mA 0...25000 counts 4...20 mA 0...16000 counts 4...20 mA 0...4095 counts
Absolute accuracy error	+/- 0.2 % of full scale 77 °F (25 °C)
Linearity	+/- 12 µA 4...20 mA 0...4095 counts +/- 4 µA 0...20 mA 0...20000 counts +/- 4 µA 0...25 mA 0...25000 counts +/- 4 µA 4...20 mA 0...16000 counts
Accuracy drift according to temperature	0.004 % of full scale/°C typical 0.007 % of full scale/°C maximum
Isolation between channels and bus	1780 V for 1 minute AC
Update time	5 ms
Setting time	3.2 ms to +/-0.1% of the final value 1.6 ms to 5% of the final value
Fault type	Open circuit 4...20 mA
Bus current requirement	550 mA
Maximum power dissipation in W	5 W
External power requirement	6...30 V
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault 8 LEDs (green) for channel is turned on 8 LEDs (red) for channel fault
Module format	Standard
Product Weight	0.7 lb(US) (0.3 kg)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Product Certifications	cUL FM Class 1 Division 2
Standards	UL 508 CSA C22.2 No 142
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80…2000 MHz IEC 801-3
Ambient Air Temperature for Operation	32…140 °F (0…60 °C)
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
GTIN	3595861148017
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.890 in (4.800 cm)
Package 1 Width	6.575 in (16.700 cm)
Package 1 Length	12.402 in (31.500 cm)
Package weight(Lbs)	15.450 oz (438.000 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension

Repair	No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

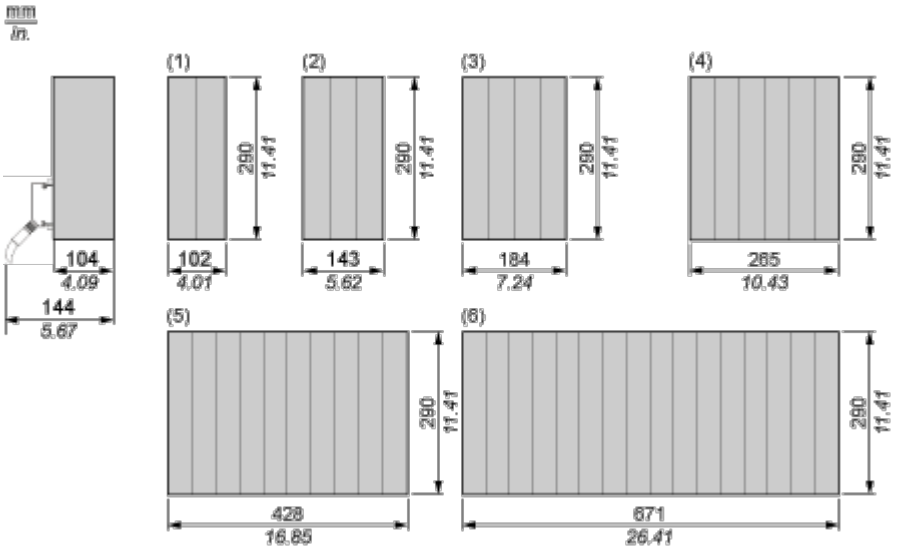

(1) 2 slots

(2) 3 slots

(3) 4 slots

(4) 6 slots


(5) 10 slots

(6) 16 slots

Connections and Schema

High Density Analog Output Module (8-Channel)

Wiring Diagram

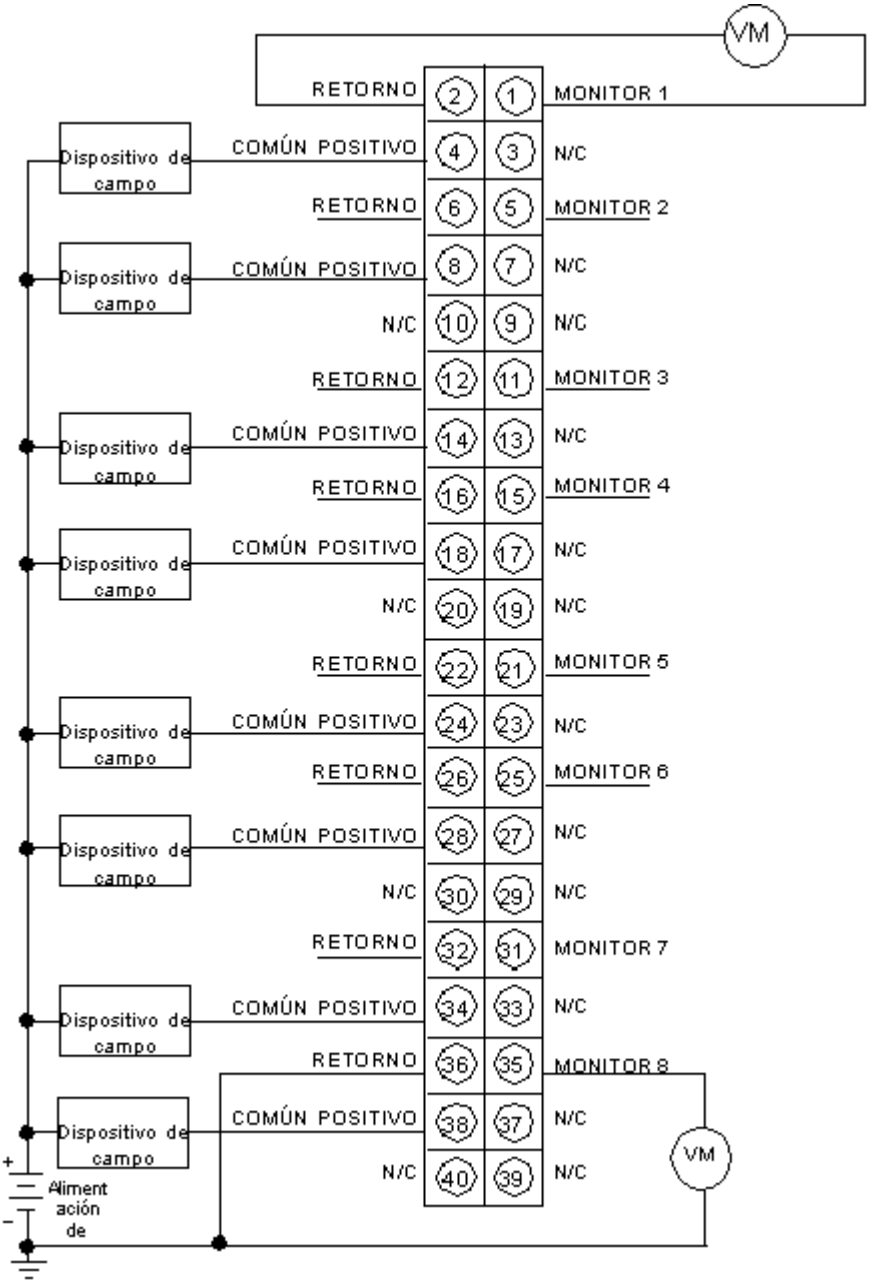

N/C Not Connected

All terminals labeled "RETURN" are common inside the module.