Product data sheet

Specifications



USB charger + socket-outlet, X Series, 15 A socket, 5.4 A USB A/C, duplex, tamper resistant, white, matte finish

SQR55153WH

Product availability: Stock - Normally stocked in distribution facility

Main

Range	Square D X Series
Product or Component Type	Socket-outlet with USB charger
Aesthetic name	X Series
Color	White

Complementary

Device Application	Power supply
Device presentation	Mechanism with fixing frame
Integrated connection type	2 socket-outlet 15 A 1 USB type A 2.4 A 1 USB type C 3 A
Outlet poles configuration	2 x 2P + E
Outlet standard	NEMA
Socket additional information	Tamper resistant
Number of modules	1
[Ue] rated operational voltage	125 V
Network type	AC
Network Frequency	60 Hz
Number of gangs	1 gang
Device mounting	Flush
Mounting Mode	By screws
Material	Plastic: strap Metal: fixing frame
Surface Finish	Matte
Connections - terminals	Phase and neutral 2 screw terminal Earth 1 screw terminal
Earth circuit	Self earthing
Height	4.06 in (103 mm)
Width	1.7 in (44 mm)
Depth	1.7 in (44 mm)
Quantity per Set	1 piece

Environment

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	cULus
Standards	UL 498 UL 1310 FCC Part 15 class B ICES-003

Ordering and shipping details

Category	US10DE909931
Discount Schedule	0DE9
GTIN	785901546467
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.2 in (10.6 cm)
Package 1 Width	2.1 in (5.4 cm)
Package 1 Length	2.2 in (5.5 cm)
Package weight(Lbs)	6.7 oz (190.5 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.4 in (11.3 cm)
Package 2 Width	4.6 in (11.7 cm)
Package 2 Length	11.02 in (28.0 cm)
Package 2 Weight	3.624 lb(US) (1.644 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	40
Package 3 Height	11.8 in (30.0 cm)
Package 3 Width	9.4 in (24.0 cm)
Package 3 Length	10.08 in (25.6 cm)
Package 3 Weight	16.702 lb(US) (7.576 kg)

Contractual warranty

Warranty (in months)	24

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**401 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**396 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**2 kg CO2 eq.**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again

Repack and remanufacture

Recyclability potential, in %	**6**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration

Wiring diagram

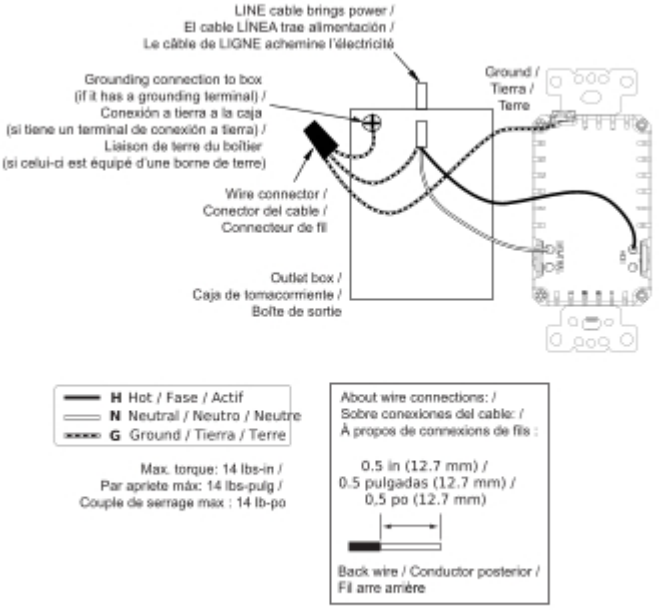


Image of product / Alternate images

Alternative






3A
2.4A
Class 2. Max 5.4A
15A 125VAC 60Hz






WHITE
NEUTRAL
HOT
BLACK

Image of product in real life situation

