Product data sheet

Specifications



Socket-outlet, X Series, 15 A, decorator, tamper resistant, weatherproof, residential, white, matte finish

SQR44104WH

Product availability: Stock - Normally stocked in distribution facility

Main

Range	Square D X Series
Product or Component Type	Socket-outlet
Aesthetic name	X Series
Device Application	Power supply
Device presentation	Mechanism with fixing frame
Body type	Decorator
Socket number	2
Outlet poles configuration	2P + E
Outlet standard	NEMA
Socket additional information	Tamper resistant

Complementary

Device mounting	Flush
Mounting Mode	By screws
[Ie] rated operational current AC	15 A
[Ue] rated operational voltage	125 V
Network type	AC
Network Frequency	60 Hz
Number of gangs	1 gang
Number of modules	1
Color	White
Surface Finish	Matte
Material	Plastic: strap Metal: fixing frame
Connections - terminals	Phase and neutral 4 screw terminal AWG 14...AWG 12) copper Phase and neutral 4 push-in termination AWG 14), solid copper Earth 1 screw terminal copper
Earth circuit	Self earthing
Width	1.4 in (36 mm)
Height	4.06 in (103 mm)
Depth	1.06 in (27 mm)
Quantity per Set	1 piece

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Environmental characteristic	Weatherproof
Product Certifications	cULus
Standards	UL 498 NEMA 5-15R

Ordering and shipping details

Category	US10DE909931
Discount Schedule	0DE9
GTIN	785901542568
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.2 in (10.6 cm)
Package 1 Width	1.2 in (3.1 cm)
Package 1 Length	1.7 in (4.2 cm)
Package weight(Lbs)	3.4 oz (96 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.4 in (11.3 cm)
Package 2 Width	3.6 in (9.1 cm)
Package 2 Length	6.5 in (16.5 cm)
Package 2 Weight	29.0 oz (822.0 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	100
Package 3 Height	7.3 in (18.5 cm)
Package 3 Width	9.5 in (24.1 cm)
Package 3 Length	18.9 in (48.0 cm)
Package 3 Weight	20.316 lb(US) (9.215 kg)

Contractual warranty

Warranty (in months)	24

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again

Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration

Wiring diagram



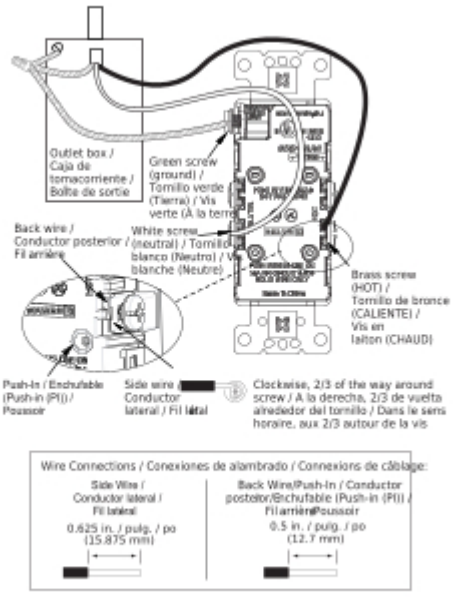


Image of product / Alternate images

Alternative

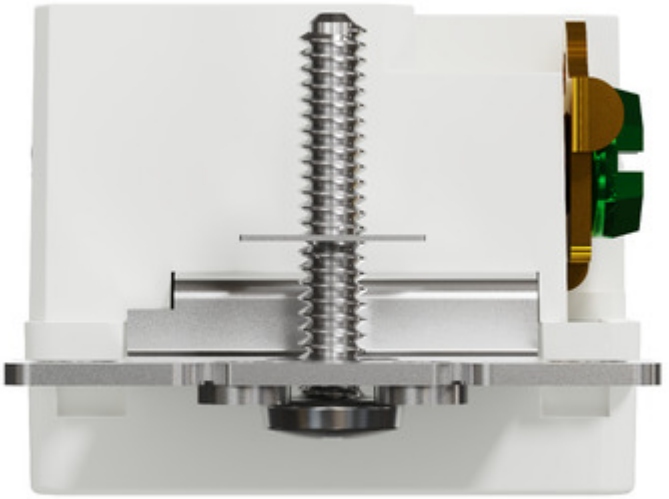

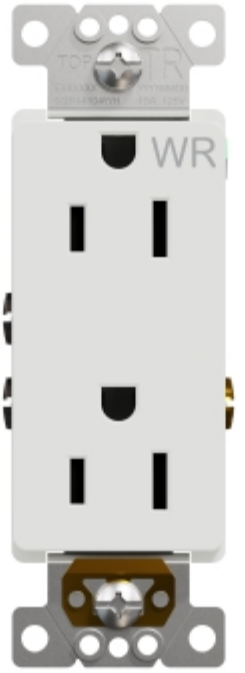


WR


PUSH IN TERMINALS
NOT FOR REUSE
PUSH WIRING USE ON
15A BR CIRCUIT & #14
SOLID WIRE ONLY
Made in China






SIDE WIRE #12,#14
PUSH IN TERMINALS
NOT FOR RELISE
NEUTRAL
HOT
SQUARE D
PUSH WIRING USE ON
15A BR CIRCUIT & #14
SOLID WIRE ONLY
Made in China

Image of product in real life situation

