# Product data sheet

Specifications



## Socket-outlet, X Series, 15 A, decorator, tamper resistant, residential, black, matte finish

SQR44101BK

**Product availability: Stock - Normally stocked in distribution facility**

## Main

| | |
|---|---|
| **Range** | Square D X Series |
| **Product or Component Type** | Socket-outlet |
| **Aesthetic name** | X Series |
| **Device Application** | Power supply |
| **Device presentation** | Mechanism with fixing frame |
| **Body type** | Decorator |
| **Socket number** | 2 |
| **Outlet poles configuration** | 2P + E |
| **Outlet standard** | NEMA |
| **Socket additional information** | Tamper resistant |

## Complementary

| | |
|---|---|
| **Device mounting** | Flush |
| **Mounting Mode** | By screws |
| **[Ie] rated operational current AC** | 15 A |
| **[Ue] rated operational voltage** | 125 V |
| **Network type** | AC |
| **Network Frequency** | 60 Hz |
| **Number of gangs** | 1 gang |
| **Number of modules** | 1 |
| **Color** | Black |
| **surface treatment** | Painted |
| **Surface Finish** | Matte |
| **Material** | Plastic: strap<br>Metal: fixing frame |
| **Connections - terminals** | Phase and neutral 4 screw terminal AWG 14...AWG 12) copper<br>Phase and neutral 4 push-in termination AWG 14), solid copper<br>Earth 1 screw terminal copper |
| **Earth circuit** | Self earthing |
| **Width** | 1.4 in (36 mm) |
| **Height** | 4.06 in (103 mm) |
| **Depth** | 1.06 in (27 mm) |
| **Quantity per Set** | 1 piece |

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Environment

| | |
|---|---|
| **Product Certifications** | cULus |
| **Standards** | UL 498<br>NEMA 5-15R |

## Ordering and shipping details

| | |
|---|---|
| **Category** | US10DE909931 |
| **Discount Schedule** | 0DE9 |
| **GTIN** | 785901535706 |
| **Returnability** | Yes |
| **Country of origin** | CN |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Nbr. of units in pkg.** | 1 |
| **Package 1 Height** | 4.2 in (10.6 cm) |
| **Package 1 Width** | 1.2 in (3.1 cm) |
| **Package 1 Length** | 1.7 in (4.2 cm) |
| **Package weight(Lbs)** | 3.4 oz (96 g) |
| **Unit Type of Package 2** | BB1 |
| **Number of Units in Package 2** | 10 |
| **Package 2 Height** | 4.4 in (11.3 cm) |
| **Package 2 Width** | 3.6 in (9.1 cm) |
| **Package 2 Length** | 6.5 in (16.5 cm) |
| **Package 2 Weight** | 29.0 oz (822.0 g) |
| **Unit Type of Package 3** | CAR |
| **Number of Units in Package 3** | 100 |
| **Package 3 Height** | 7.3 in (18.5 cm) |
| **Package 3 Width** | 9.5 in (24.1 cm) |
| **Package 3 Length** | 18.9 in (48.0 cm) |
| **Package 3 Weight** | 20.316 lb(US) (9.215 kg) |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 24 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

### Use Better

#### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | **Yes** |
| Packaging without single use plastic | **Yes** |
| EU RoHS Directive | **Compliant** |
| REACh Regulation | **Free of Substances of Very High Concern above the threshold** |
| California proposition 65 | **WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov** |

### Use Longer

#### Lifetime extension

| | |
|---|---|
| Repair | **No** |


### Use Again

#### Repack and remanufacture

| | |
|---|---|
| Circularity Profile | **No need of specific recycling operations** |
| Take-back | **No** |

Technical Illustration

**Wiring diagram**

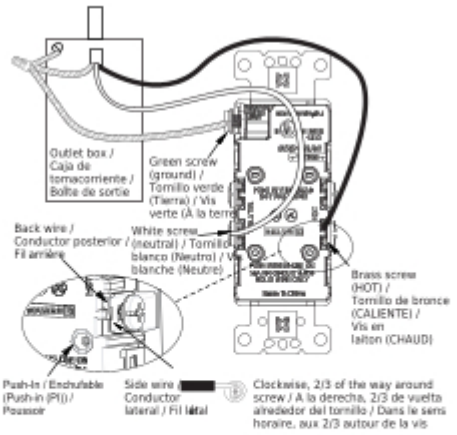

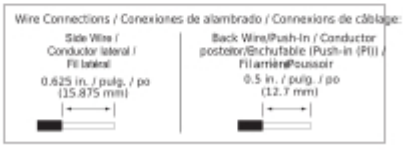



Image of product / Alternate images

**Alternative**






SIDE WIRE #12,#14
PUSH IN TERMINALS
NOT FOR REUSE
NEUTRAL
LOAD
PUSH WIRING USE ON
15A BR CIRCUIT & #14
SOLID WIRE ONLY
Made In China

