2' Ti TUBE SERIES

Ti - Two Foot - 10 Watts

Project: Date:

Catalog #:

Notes:

Key Features & Benefits:


- Quick Connect Technology
  - No need to worry about shunted or non-shunted tombstones
  - Extremely fast installation
  - No power though the pins
  - Power through the cord
- Interchangeable End Caps – Designed to Work With any Tombstone
  - G13 (Standard)
  - Fa8 (Single Pin)
  - R17D (HO)
- Long Life 80,000 Hours (L70)
  - 10 year warranty (12 hour run times)
  - 7 year warranty (24 hour run times)
- Universal Input 120-277V; 50/60Hz External Driver
- Glass Free
- Vibration and Impact Resistant
- No UV Emission
- Suitable for Dry and Damp Locations



G13 (Standard)

Fa8 (Single Pin)

R17D (HO)

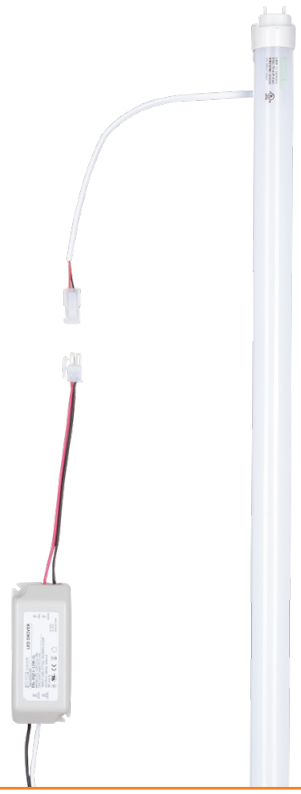

10 YEAR 7 YEAR LIMITED WARRANTY

c UL us LISTED

DAMP LOCATION

Electrical Data:

Light Specifications:

Lumen Output: Up to 1,240 Lumens
Efficacy (lm/W): Up to 124 Lumens per Watt
Kelvin: 3000K, 3500K, 4000K, 5000K
Color Rendering Index (CRI): >82
Rated Life: >80,000 Hours

Driver Data:

Input Voltage: 120-277 VAC
Input Power: 10W
Input Current @ 120V: 0.083 Amps
Input Current @ 240V: 0.041 Amps
Input Current @ 277V: 0.036 Amps
Total Harmonic Distortion (THD): <10%
Operating Temperature: -4 ~ 122°F

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-Ti-2-S-10W-1L-F30	10W	1,180	118	3000K
ESL-Ti-2-S-10W-1L-F35	10W	1,180	118	3500K
ESL-Ti-2-S-10W-1L-F40	10W	1,200	120	4000K
ESL-Ti-2-S-10W-1L-F50	10W	1,240	124	5000K

Copyright © 2018 ESL Vision, LLC. All rights reserved. Rev: 07/18/2018

2' Ti TUBE SERIES

Technical Specifications

Ordering Guide:


ESL	-	Ti	-	2	-	S	-	10W	-	1L	-	F	
ESL		TYPE		LENGTH		CLASS		WATTS		LAMP		LENS	KELVIN
		Ti Series		2 (Two Feet)		S		10W (10 Watts) 13W (13 Watts)		1L (One Lamp) 2L (Two Lamp) 3L (Three Lamp) 4L (Four Lamp)		F (Frosted)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)

Endcap Options:

ENDCAP	
ESL-Ti-G13* ESL-Ti-Fa8 ESL-Ti-HO	

*Standard endcap


Alternate Ti Options:



2L Output



3L Output




4L Output

Alternate Driver Options:


ESL-DQC1-10W-1L	Single Output for 10 Watt Kit
ESL-DQC1-13W-1L	Single Output for 13 Watt Kit
ESL-DQC3-10W-2L	Dual Output for 20 Watt Kit
ESL-DQC3-13W-2L	Dual Output for 26 Watt Kit
ESL-DQC3-10W-3L	Triple Output for 30 Watt Kit
ESL-DQC3-13W-3L	Triple Output for 39 Watt Kit
ESL-DQC3-10W-4L	Quad Output for 40 Watt Kit
ESL-DQC3-13W-4L	Quad Output for 52 Watt Kit

Dimensions:

Ti:

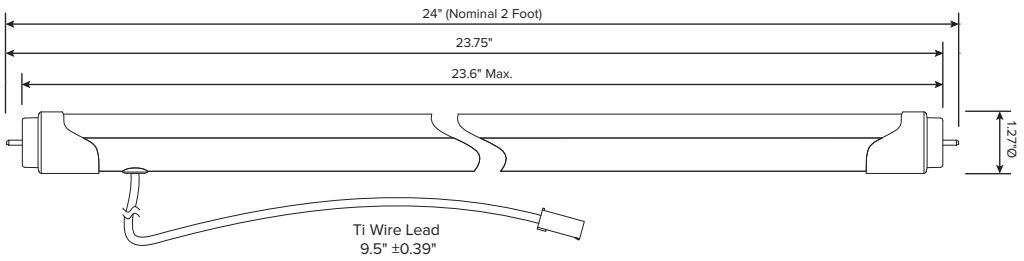

Driver:

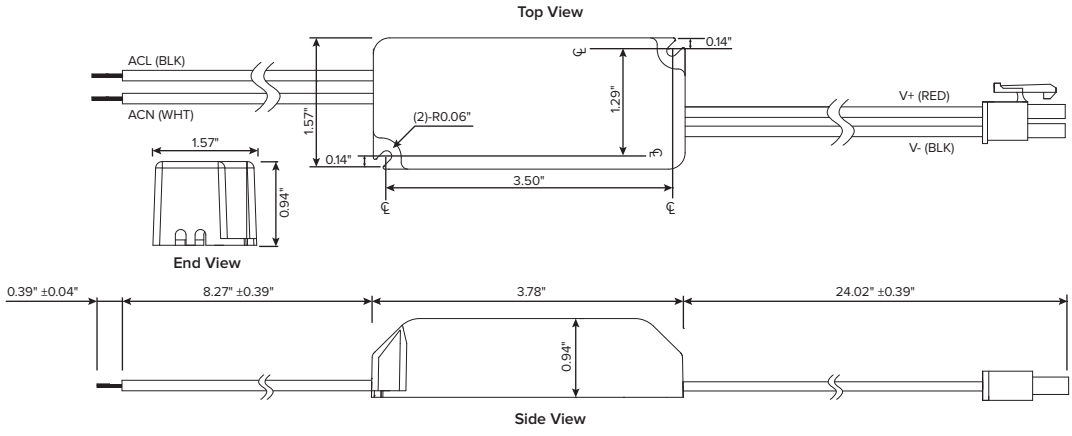

Copyright © 2018 ESL Vision, LLC. All rights reserved. Rev: 07/18/2018