

LITHONIA LIGHTING®

DSXWPM Area Light

D-Series LED Area Pole Mount Luminaire

Great Price. Proven Performance.

Lithonia Lighting has developed a pole mount version of the high performing D-Series wall mount luminaire to create a lower cost 250W metal halide replacement. With the D-Series DSXWPM LED, you don't have to sacrifice performance for price.

Key Features:

- Energy savings up to 75% vs. comparable metal halide luminaires; saves more than $97 per luminaire, per year over 250W metal halide
- Proprietary precision optics deliver exceptional uniformity and allow increased spacing, resulting in fewer poles and lower overall cost
- Easy to install. Mounts to all existing drill hole patterns (round or square poles)
- Optional passive infrared motion sensor with adjustable bi-level dimming
- 20+ years expected service life (with lumen maintenance of L88/100,000 hours)
- Optional diffuse optics reduce pixilation and create soft, comfortable illumination while maintaining listing on the DesignLights Consortium® (DLC) qualified product list.



DSXWPM LED

Quick Facts:

- Replaces up to 250W metal halide luminaires
- Lumen packages from 797 – 8,335 lumens
- Efficacies up to 136 lumens per watt
- 12 photometric distributions available
- Available in 3000K, 4000K & 5000K CCT and amber LEDs
- Best-in-class Category C surge protection
- Weight: 16 lbs; EPA: 0.8 ft^2

Learn more about our outdoor solutions at www.acuitybrands.com

D-Series LED Area Luminaire


Ordering Information

EXAMPLE: DSXWPM LED 20C 1000 40K T5M MVOLT SPUMBA DDBXD

DSXWPM LED

Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	Control options	Other options	Finish *(required)*
DSXWPM LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines)	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000K 40K 4000K 50K 5000K AMBPC Amber phosphor converted	T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5M Type V medium T5S Type V short T5A TYPE V AREA T5W Type V wide ASYDF Asymmetric diffuse SYMDF Symmetric diffuse	MVOLT 120 208 240 277 347 480	**Shipped included** SPUMBA Square pole universal mounting adapter RPUMBA Round pole universal mounting adapter PUMBA Square and round pole universal mounting adapters	**Shipped installed** PE Photoelectric cell, button type DMG 0-10V dimming driver (no controls) PIR Motion/ambient light sensor, <15' mtg ht PIRH Motion/ ambient light sensor, 15-30' mtg ht PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc	**Shipped installed** SF Single fuse (120, 277, 347V) DF Double fuse (208, 240, 480V) HS House-side shield **Shipped separately** BSW Bird-deterrent spikes WG Wire guard VG Vandal guard DDL Diffused drop lens	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone

Drilling

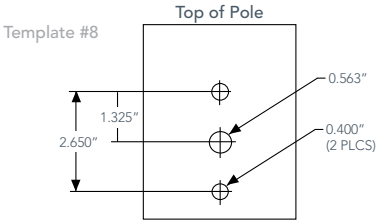

If ordering new poles, specify the AERIS™ drilling pattern, per the table below.

DM19AS Single Unit **DM28AS** 2 at 180°

Example: SSA 20 4C **DM19AS** DDBXD

Wall Luminaire Accessories
Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory
DSXWDDL U	Diffused drop lens

Universal Mounting Adapters

Easy to install.
Mounts to all existing drill hole patterns for round or square poles.



Please use the spec sheet at www.acuitybrands.com when ordering to ensure component compatibility for your desired configuration.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.



DSXWPM LED

One Lithonia Way | Conyers, Georgia 30012 | Phone: 800.279.8041 | www.acuitybrands.com
©2016 Acuity Brands Lighting, Inc. All rights reserved. | 5/16 | LL_2945