369976d 1 10.26.21

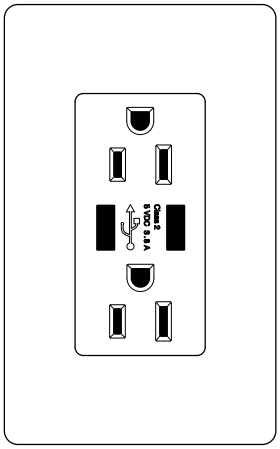
USB Receptacles - 15 A

Features

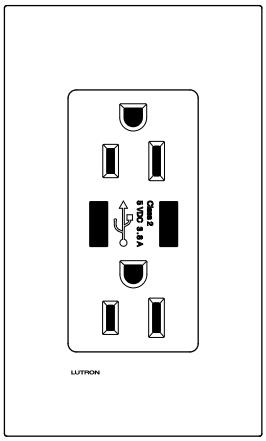
- Dual USB ports.
- Color and texture matches Lutron dimmers.
- Wallplates available in a variety of colors and finishes.
- Tamper resistant.
- Side or back wire installation capable.
- 125 V~ only (U.S. style wallbox).
- Designer style receptacles (Claro) can be ganged with other designer style devices.
- Architectural style receptacles (Nova T☆) can be ganged with other architectural style devices.

15 A USB Receptacles

Designer (Claro)



Architectural (Nova T☆)



Model Numbers

Designer (Claro) (Gloss and Satin Finishes)	
CAR-15-UBTR-XX[1, 2]	15 A Claro Receptacle (Gloss Finish)
SCR-15-UBTR-YY[1, 3]	15 A Claro Receptacle (Satin Finish)
Architectural (Nova T☆)	
NTR-15-UBTR-ZZ[4, 5]	15 A Nova T☆ Receptacle

[1] Wallplates ordered separately. For information on ordering wallplates, please visit www.lutron.com/en-US/Products/Pages/StandAloneControls/Wallplates-Accessories/WallplatesAccessories.aspx

[2] "XX" in model number represents Gloss finish. See page 5 for corresponding **Color / Finish Codes**.

[3] "YY" in model number represents Satin finish. See page 5 for corresponding **Color / Finish Codes**.

[4] "ZZ" in model number represents Architectural Matte finish. See page 6 for corresponding **Color / Finish Codes**.

[5] Wallplates provided for single gang receptacles. For information on ordering multi-gang wallplates, please visit www.lutron.com/en-US/Products/Pages/StandAloneControls/Wallplates-Accessories/WallplatesAccessories.aspx

LUTRON SPECIFICATION SUBMITTAL Page: 1

Job Name:	Model Numbers:	
Job Number:		

Specifications

Regulatory Approvals

- Lutron Quality Systems registered to ISO 9001:2008.
- All receptacles comply with UL498
- USB receptacle complies with UL1310

Ratings

- 15 A 125 V~ 60 Hz
- USB 3.8 A* 5 V⎓ dual output Type A 2.0 (3.8 A is the combined output of both ports)
- Dielectric withstand: 1500 V~ for 1 minute
- Off state power consumption: 0.1 W
- USB ports: Rated for minimum 10,000 insertions and removals
- Complies with battery charging specification BC1.2
- Compatible with USB 1.1/2.0/3.0 devices

Terminals

- Each terminal accepts up to two 14 AWG to 10 AWG (1.5 mm^2 to 6.0 mm^2) wires.
- Side or back wire installation capable.
- Solid or stranded wires.
- Copper wires only.

Environment

- Ambient operating temperature: 32 ˚F to 104 ˚F (0 ˚C to 40 ˚C)
- Maximum 90% non-condensing relative humidity
- Indoor use only

Mounting

- Minimum wallbox dimensions: 3 in (76 mm) H x 2 in (51 mm) W x 2.5 in (64 mm) D.

* Charging certain combinations of devices from the USB ports, may result in currents greater than the 3.8 A product rating.

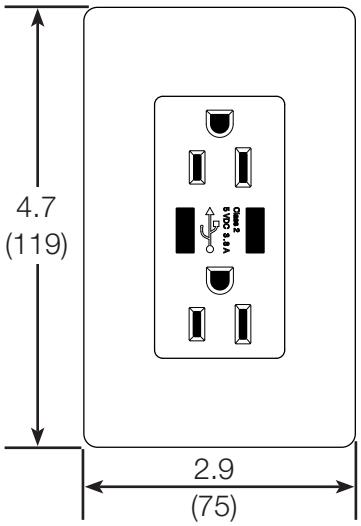
Job Name:	Model Numbers:	
Job Number:		

Dimensions

Measurements shown as: in (mm)

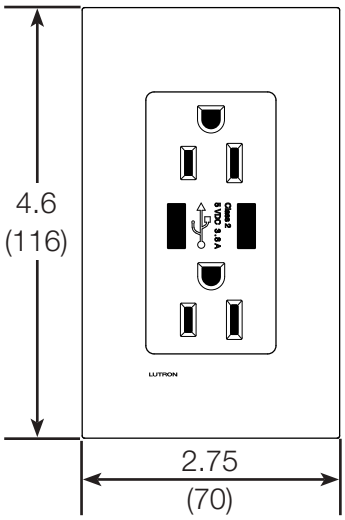
Designer (Claro)

Front

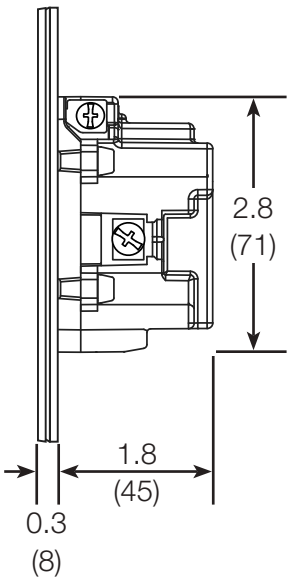


Architectural (Nova T☆)

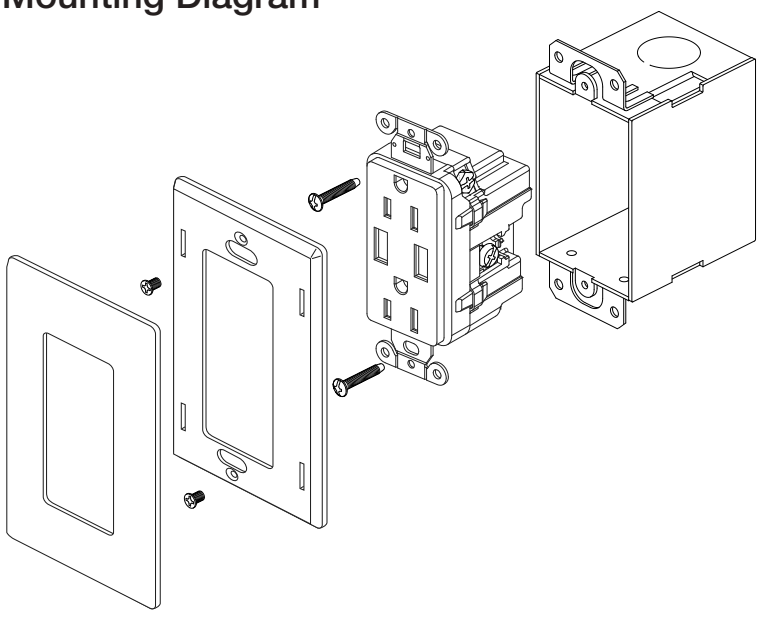
Front



Side

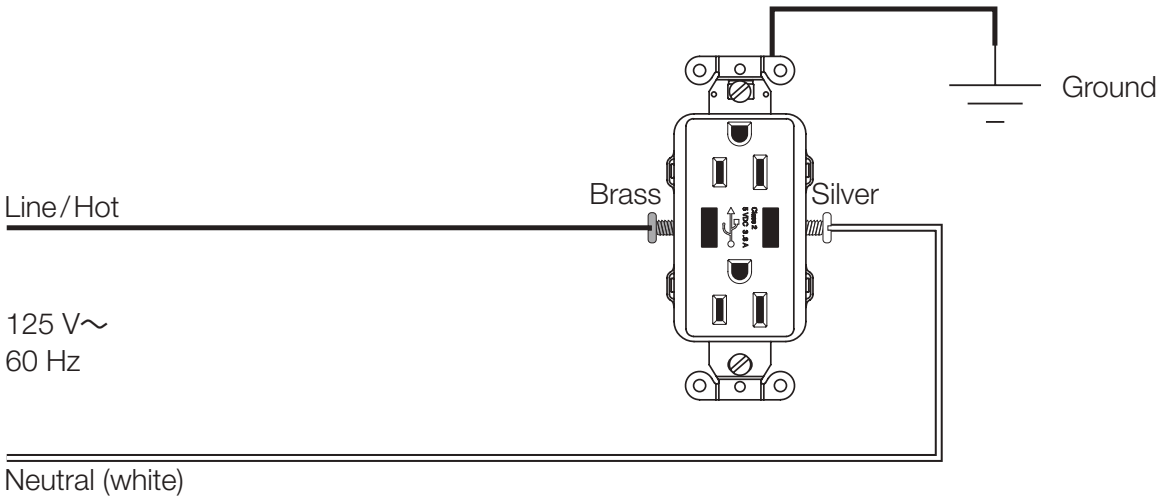


Mounting Diagram



Job Name:	Model Numbers:	
Job Number:		

Wiring Diagram





Note: Top and bottom receptacles cannot be split apart into independent Line Hot and Switched Hot connections.


Job Name:	Model Numbers:	
Job Number:		


Colors and Finishes


Gloss Finishes


White
WH


Ivory
IV


Almond
AL



Light Almond
LA



Gray
GR



Brown
BR



Black
BL


Satin Finishes



Brilliant White
BW



Glacier White
GL


Snow
SW



Architectural White
RW


Lunar Gray
LG



Mist
MI



Pebble
PB



Cobblestone
CS



Slate
SL



Midnight
MN



Biscuit
BI


Sand
SD


Taupe
TP


Pumice
PM


Clay
CY


Sage
SA


Espresso
EP


Truffle
TF


Deep Sea
DE


Signal Red
SR


- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
  Gloss Finishes: DG-CK-1
  Satin Finishes: SF-CK-1
  For coordinating wallplates and accessories, visit lutron.com/claro


Continued on next page...


Job Name:	Model Numbers:	
Job Number:		


Colors and Finishes (*continued*)


Architectural Matte Finishes


White
WH


Ivory
IV



Almond
AL


Light Almond
LA



Gray
GR


Brown
BR


Black
BL


Taupe
TP


Sienna
SI



Beige
BE


Satin Colors (while supplies last)


Hot
HT



Merlot
MR


Plum
PL


Palladium
PD



Eggshell
ES



Sienna
SI


Terracotta
TC


Greenbriar
GB


Bluestone
BG


Mocha Stone
MS


Goldstone
GS


Desert Stone
DS


Stone
ST


Limestone
LS

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
  Architectural Matte Finishes: AM-CK-1
  Satin Colors: SC-CK-1 (while supplies last)

The Lutron logo, Lutron, Claro, Satin Colors and Nova T☆ are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

Job Name:	Model Numbers:	
Job Number:		