Product data sheet

Specifications



NEMA Control Relay, Type X, master contact cartridge, 10A resistive at 600VAC, 1NO or 1NC contact

8501XC4

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	8501X
Relay Type	Control relay
Product or Component Type	Master contact cartridge

Complementary

Rated breaking capacity	6 A 120 V AC inductive control circuit UL 508 3 A 240 V AC inductive control circuit UL 508 1.5 A 480 V AC inductive control circuit UL 508 1.2 A 600 V AC inductive control circuit UL 508 10 A <= 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC resistive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
[Icm] rated short-circuit making capacity	60 A 120 V AC inductive control circuit UL 508 30 A 240 V AC inductive control circuit UL 508 15 A 480 V AC inductive control circuit UL 508 12 A 600 V AC inductive control circuit UL 508 10 A <= 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC inductive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
Contacts Configuration	1 NO 1 master contact cartridge

Environment

Product Certifications	UL recognized E78403 CCN NKCR2 CE CSA LR60905 class 3211 02

Ordering and shipping details

Category	US10CP221159
Discount Schedule	0CP2
GTIN	785901537137
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Nbr. of units in pkg.	1
Package 1 Height	8.890 in (22.581 cm)
Package 1 Width	3.500 in (8.890 cm)
Package 1 Length	22.581 in (57.355 cm)
Package weight(Lbs)	0.320 oz (9.072 g)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension

Repair	No

Use Again

Repack and remanufacture


Circularity Profile	End of Life Information
Take-back	No

Image of product / Alternate images

Alternative





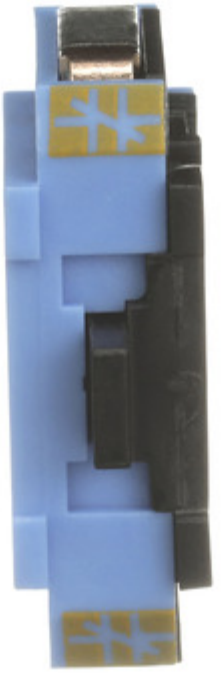


SQUARE D
8501XC4
SER. A
24
Assembled in Mexico
Ensamblado en México
Assemblé au Mexique