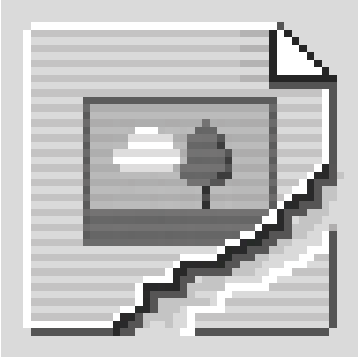


SKU: J6

UPC: 0783669010381

Features & Benefits:

Description: Permaground Bronze Ground Clamp, Conductor Range 4-10, Pipe Sizes 4-1/2 to 6in

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	1
Wire Orientation	Parallel

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	4 Sol - 10 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	4 Str - 10 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA
NPS/IPS Pipe Size	5-3/8

Dimensions

Drive Size Main	NA
Height (IN)	7.498
Height BX (IN)	6
Height (mm)	190.4492
Length (IN)	7.813
Length (mm)	198.4502
Weight (LB)	1.325
Width (IN)	0.938
Width BX (IN)	8
Width (mm)	23.8252

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Bronze

nVent ILSCO
4701 Creek Rd, Suite 110
CINCINNATI, OH 45227
513-533-6200
800-776-9775

Additional Technical Specifications

Conductor Type	Solid

Bolt and Screw Sizes

Number of Wire Binding Screws per Port	1
Wire Binding Screw Size	NA

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 10
Direct Burial	No
Dual Rated	No
NEMA Code	S-573-2
UPC Code	78366901038

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	8M24
UL / CULUS Specification	UL 467 Listed
UL File Number	E207816