R6R8930120WB



UPC: 019813512754

Color: White

Weight: 0.6 lbs

Project:	Type:
Prepared By:	Date:

Driver Info

Type	Constant Current
120V	0.07A
208V	N/A
240V	N/A
277V	N/A
Input Watts	7.7W

LED Info

Watts	8W
Color Temp	3000K (Warm)
Color Accuracy	92 CRI
L70 Lifespan	50,000 Hours
Lumens	769
Efficacy	99.9 lm/W

Technical Specifications

Listings

UL Classified:

Suitable for wet locations

ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2 Certified.

Energy Star Model Number:

DLR0022

Energy Star ID:

2350015

NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C5).

California Title 24:

Can be used to conform with the requirements of California Title 24 Part 6.

California Title 20:

Compliant LED Product

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 5%. See dimmer compatibility guide here.

THD:

<20%

Power Factor:

≥0.9

THDi:

Produces less than 20% THD

PF:

≥0.9

Input Voltage:

120V

Operating Frequency (Hz):

60Hz

Copyright © 2020 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Shape:

Round

Trim Style:

Baffle Trim

Housing:

Constructed from durable steel sheet metal

Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Lens:

Frosted polycarbonate diffusion lens. Regressed lens. Constructed from durable sheet metal construction.

Green Technology:

Mercury and UV free. RoHS-compliant components.

Mounting:

Easy installation with friction clips (4") and torsion springs (5"/6")

Socket Adapter:

Edison 26 Medium Base Socket adapter included in box

Compatible:

Compatible with most 5" and 6" recessed housings

Finish:

Matte White

Optical

Beam Angle:

95°±10°

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Wattage Equivalency:

65W Incandescent

R9 Value:

High color performance with R9 greater than or equal to 50

Flicker:

Silent and flicker free operations of less than 30%

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	15.47	7.99	7.95
PALLET	600	7.56	3.82	82.28


Dimension

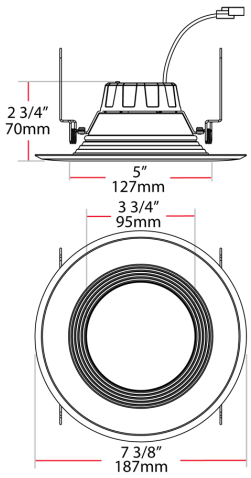

Copyright © 2020 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

R6R8930120WB

Light Distribution

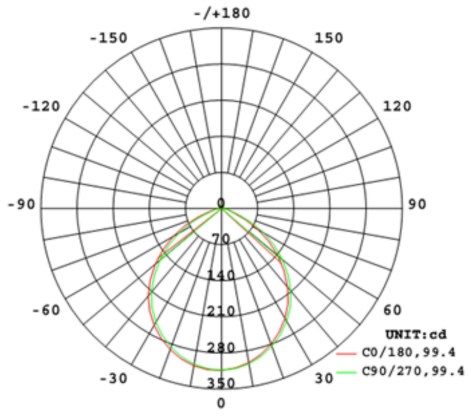

Features

- High Performance LEDS up to 106 lm/w
- Use to replace up to 100W traditional light sources
- Durable construction: dent and scratch resistant
- UL wet location rated
- Compatible with most standard recessed housings
- Dimmable down to 5% on compatible dimmers
- Available in 4 color temperatures: 2700K, 3000K, 3500K, 4000K
- Smooth diffusing regressed lens
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Dimming	Finish	Trim
R	6	R	8	930	120		W	B
	4 = 4" **6 =** 6"	**R =** Round **S =** Square	**7 =** 600lm-700lm **8 =** 700lm-850lm **10 =** 850lm-1000lm **11 =** 900lm-1050lm **14 =** 1200lm-1400lm	**940 =** 90 CRI, 4000K (Neutral) **935 =** 90 CRI, 3500K (Warm Neutral) **930 =** 90 CRI, 3000K (Warm) **927 =** 90 CRI, 2700K (Residential Warm) **840 =** 80 CRI, 4000K (Neutral) **835 =** 80 CRI, 3500K (Warm Neutral) **830 =** 80 CRI, 3000K (Warm) **827 =** 80 CRI, 2700K (Residential Warm)	**120 =** 120V **UNV =** 120-277V	**Blank =** TRIAC Dimming **T =** TRIAC Dimming	**W =** White	**B =** Baffle **S =** Smooth

Copyright © 2020 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice