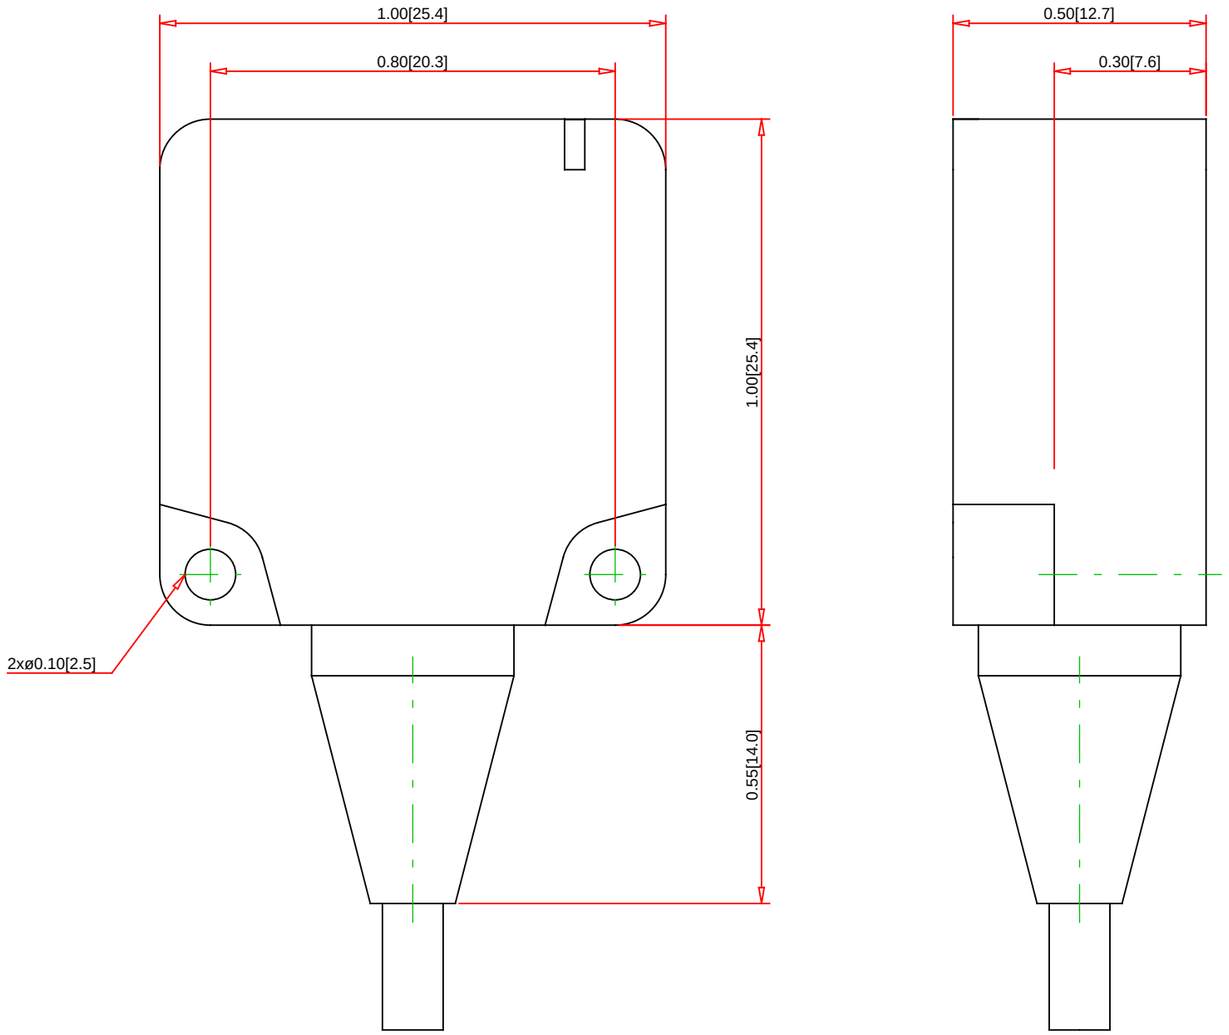


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XS8E1A1MBL2

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Detecting Distance:	15.0 mm (0.59 in)
Circuit Type:	2 wire
Output Mode:	NC
Volts Type:	AC/DC
Voltage Range:	24-240
Max Load:	200 mA
Shielding:	Self-Teach
Max Switching Frequency:	50 Hz AC/1000 DC Hz
Temp Range:	-25° to 70° C (-13° to 158° F)
NEMA Type:	4X (indoor use only)
IP Rating:	IP68
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Inductive
Description:	Proximity Sensor, Inductive, Flat Profile, 24-240, Self-Teach
Body Style:	Flat Profile
Diameter:	
Housing Material:	Polybutylene Terephthalate
Cable Size:	2.0 m (6.6 ft)
Connector Type:	
Special Features:	Auto-Adaptable