
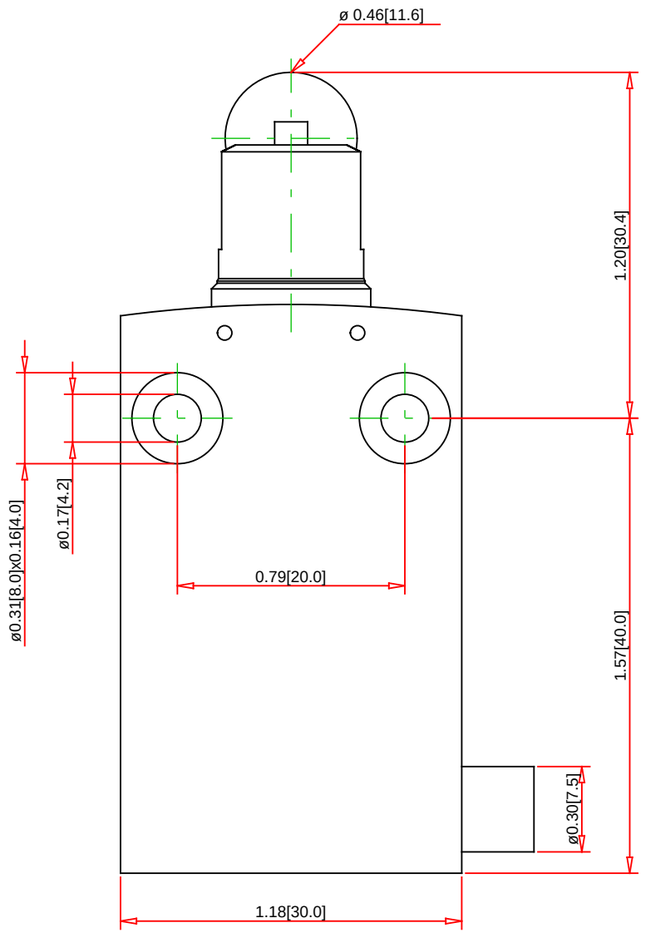


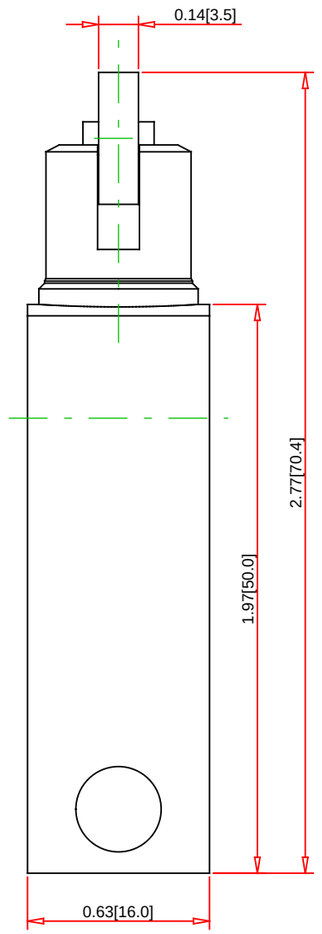

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCMN2102L1

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type:	
Enclosure Rating:	NEMA 1/2/13; IP65
Approvals:	UL # E164353 - CSA # 164581 - CE Marked
Weight:	0.080 kg (0.180 lb)
Conforming to Standards:	CENELEC EN 50047
RoHS:	Yes
Operating Temperature Range:	-13 to 158 ° F
Shock Resistance:	25G
Vibration Resistance:	5G
Max. Actuation Speed :	0.1 m/s
Repeat Accuracy:	
Operating Torque/Force:	7 Inch-Ounces (0.05Nm)

Specification:

Description:	XCMN Limit Switch Steel top roller plunger
Body Style/Type Description:	IEC OsiSense Limit Switches XCMN Miniature Monolithic 30mm Plastic Body
Head Type:	Steel roller plunger
Lever Arms:	
Body with Contact Type:	2-pole N.O./N.C. snap action
Conduit Thread:	PVR cable 1 Meter
Ampere Rating Continuous:	6A
Maximum Voltage Rating:	240VAC/250VDC
Actuation:	Horizontal
Actuator Action:	Momentary
Lever Arm Length:	
Roller Dimension:	0.46 x 0.13 in
Roller Material:	Steel
Contact Configuration:	1 N.O./1 N.C.
Contact Operation:	Snap Action
Connection Type:	PVR Cable
Head Material:	Zamak
Positive Opening:	Yes
Cable Length:	3.2 ft (1m)