Rittal – The System.

Faster – better – everywhere.

# PK Polycarbonate Housings without knockouts – PK 9524.000


Date : May 24, 2018

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# PK Polycarbonate Housings without knockouts – PK 9524.000

created: 24.05.2018 build on www.rittal.com/us-en

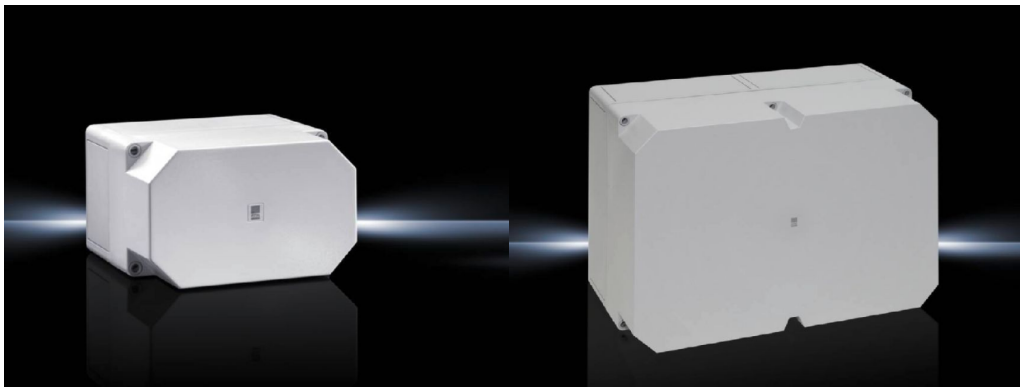

## Product description

| | |
|---|---|
| **Applications:** | Ambient temperature range: -35°C...+80°C<br>The specified temperatures can be limited by the installed equipment |
| **Material:** | Housing: Fiber-glass reinforced polycarbonate<br>Cover gray: Fiberglass-reinforced polycarbonate, all-round foamed PU seal<br>Cover screws: Polyamide<br>Insulating bungs: Polythene |
| **Color:** | RAL 7035 |
| **Protection category IP to IEC 60 529:** | IP 66 |
| **Protection category NEMA:** | NEMA 4X |
| **Supply includes:** | Housing with cover<br>Cover screws<br>Insulating bungs for wall mounting screws |
| **Base material:** | Polycarbonate |

## Product features

| | |
|---|---|
| **Dimensions:** | Height: 254 mm (10 ″)<br>Width: 360 mm (14 ″)<br>Depth: 165 mm (6.5 ″) |
| **Cover:** | gray |

© Rittal 2018

| | |
|---|---|
| **Ambient temperature range:** | -35°C...+80°C |
| **Packaging unit:** | 1 pc(s). |
| **Weight/packaging unit:** | 1.9 kg (4.2 lb.) |
| **EAN:** | 4028177139893 |
| **Customs tariff number:** | 94037000 |
| **ETIM 6.0:** | EC000261 |
| **ETIM 5.0:** | EC002600 |
| **eCl@ss 8.0/8.1:** | 27180101 |
| **eCl@ss 7.0/7.1:** | 27180101 |
| **eCl@ss 6.0/6.1:** | 27180101 |
| **eCl@ss 5.1/5.1.4:** | 27180102 |
| **Product description (long):** | PK Polycarbonate enclosure, WHD: 360x254x165 mm, fibreglass-reinforced polycarbonate, without knockouts, with grey cover |

## Approvals

| | |
|---|---|
| **Approvals:** | Bureau Veritas<br>C-UL<br>UL |
| **Declarations:** | Declaration of conformity |