Rittal – The System.

Faster – better – everywhere.

Comfort Panel – CP 8015.400


Date : May 24, 2018

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Comfort Panel – CP 8015.400 - CP121606

created: 24.05.2018 build on www.rittal.com/us-en

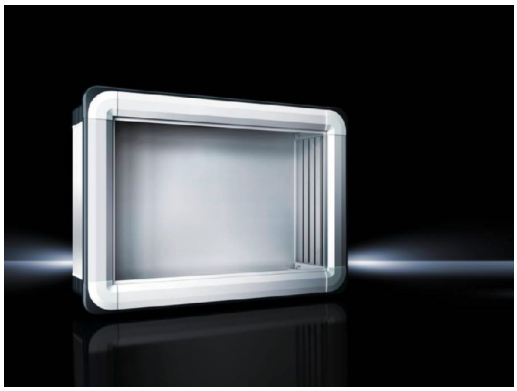

Product description

Benefits:	Aluminum housing, high thermal conductivity for optimum passive heat dissipation. Low weight coupled with high stability Compatible with all Rittal stand and support arm systems
Material:	Housing: Extruded aluminum section Corner pieces: Die-cast zinc Corner protectors: Plastic Housing: Extruded aluminum section Corner pieces: Die-cast zinc
Color:	Housing: Natural anodized. Corner pieces: RAL 7035 Corner protectors: Similar to RAL 7024
Protection category IP to IEC 60 529:	IP 65
Supply includes:	Seals and assembly components for front panels
Note:	The support arm connection may be swapped over by rotating the enclosure 3 mm double-bit lock insert may be exchanged for 41 mm lock inserts, plastic handles and T handles, type C

Product features

For the configuration of subracks:	Suitable for front panel width: 400 mm (16 ″)
Installation depth:	152 mm (6 ″)
Suitable for front panels:	with height: 300 mm (12 ″) with width: 400 mm (16 ″)

Â© Rittal 2018

Packaging unit:	1 pc(s).
Weight/packaging unit:	10 kg (22 lb.)
EAN:	86875

Approvals

Approvals:	UL + C-UL