Rittal – The System.

Faster – better – everywhere.

# Grounding Braid – SZ 2412.225


Date : May 24, 2018

ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

# Grounding Braid – SZ 2412.225

created: 24.05.2018 build on www.rittal.com/us-en

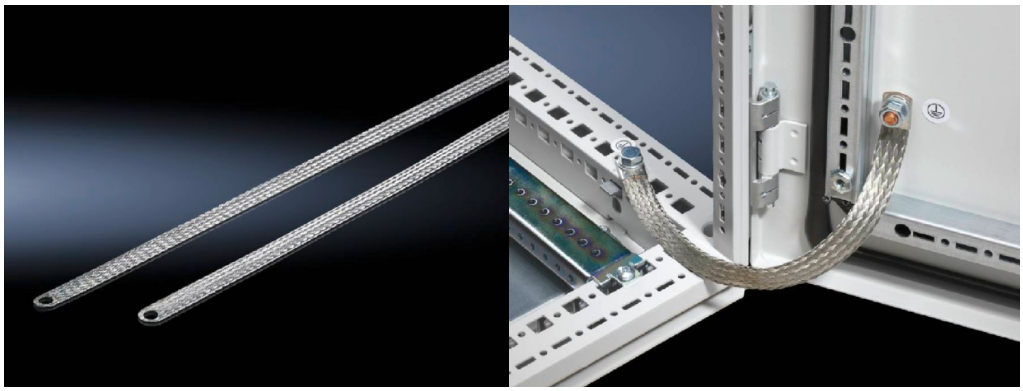

## Product description

| | |
|---|---|
| **Description:** | Tin-plated copper, in various lengths and cross-sections with press-fit contact rings. Grounding braids counteract the proximity effect at high frequencies, while offering flexible connection options. |

## Product features

| | |
|---|---|
| **Dimensions:** | Length: 200 mm (7.9 ″) |
| **Cross-section:** | 25 mm² |
| **Connection:** | M8 – M8 |
| **Packaging unit:** | 10 pc(s). |
| **Weight/packaging unit:** | 0.56 kg (1.2 lb.) |
| **EAN:** | 4028177022577 |
| **Customs tariff number:** | 74199910 |
| **ETIM 6.0:** | EC000839 |
| **ETIM 5.0:** | EC000839 |
| **eCl@ss 8.0/8.1:** | 27062302 |
| **eCl@ss 7.0/7.1:** | 27149205 |

| | |
|---|---|
| **eCl@ss 6.0/6.1:** | 27149205 |
| **eCl@ss 5.1/5.1.4:** | 27189215 |
| **Product description (long):** | SZ Earthing strap, size: M8, for diameter 25 mm² |

## Approvals

| | |
|---|---|
| **Certificates:** | EAC |