Instruction Sheet

Part No. . . . . .01855000

IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS. Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

# INSTALLATION INSTRUCTIONS CORD SUSPENDED CANOPIES

**Canopy A-101**

1. Slide shade on cord if required before mounting canopy. See instructions packed with shade.
2. Mount strap on outlet box.
3. Pass cord thru bushing, running thread, knurled nut, canopy and strap (Fig. 3). Install starin relief and determine proper cord length by sliding strain relief to desired position. (Fig. 4).
4. Make electrical connections. Connect ground wires to green ground leads. Connect white (common) to white leads. Connect power supply (line) to black leads. (see wiring diagram).

   **WARNING: DO NOT pinch wires. Consult a Qualified Electrician for all other options that require other wiring configurations.**
5. Screw running thread into strap. Adjust knurled nut so that canopy will be clamped when bushing is tight on end of running thread and canopy is flush against ceiling.

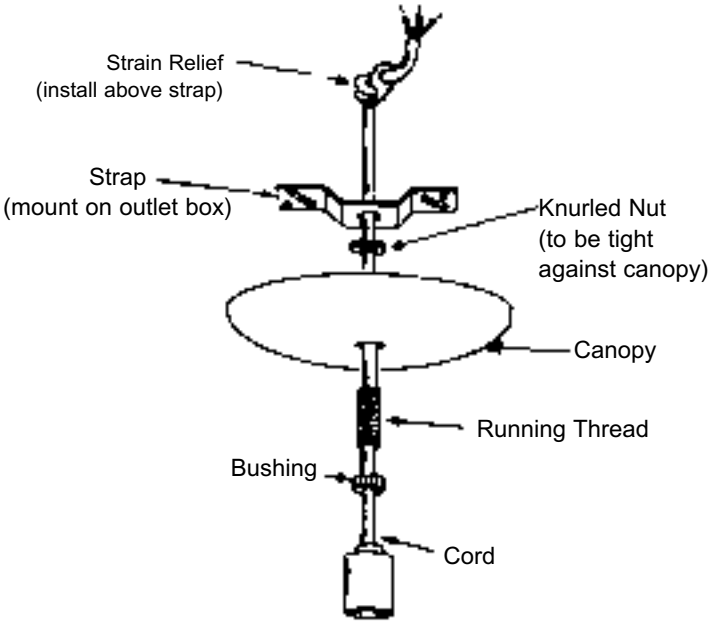



**Fig. 3**



**Fig. 4**

**STRAIN RELIEF INSTALLATION**

www.prescolite.com • Prescolite TollFree Technical Support ***1.888.PRS.4TEC*** • Hours: 8am - 5pm ET


HUBBELL®
Hubbell Lighting, Inc.
**101 Corporate Drive, Suite L • Spartanburg, SC 29303**
With representatives offices in principal cities throughout North America.


Copyright 2004, 08/04 revision, All Rights Reserved - Printed in U.S.A.


prescolite