
Product data sheet
Characteristics

8965DPR23V02
Reversing Hoist Contactor, 25 A, 3P, 110/120 VAC 50/60 Hz coil, open style

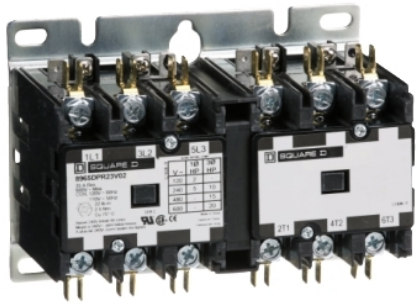

Main

Product or Component Type	Reversing Hoist Contactor
Line Rated Current	25 A
Maximum Horse Power Rating	2 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase 7.5 Hp 230 V AC, 3 phase 10 Hp 460 V AC, 3 phase 10 hp 575 V AC, 3 phase

Complementary

Product Certifications	CSA[RETURN]UL Listed
[Ue] rated operational voltage	600 V AC
Poles description	3P
[Uc] control circuit voltage	110 V AC 50 Hz 120 V AC 60 Hz
Phase	3 phase
Range of Product	DPR

Ordering and shipping details

Category	21403-8965DPR1>DPR4 - 20A>40A REV HOIST
Discount Schedule	CP1
GTIN	785901081371
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.60 in (11.684 cm)
Package 1 Width	4.80 in (12.192 cm)
Package 1 Length	6.20 in (15.748 cm)
Package 1 Weight	2.37 lb(US) (1.075 kg)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.