Rittal – The System.

Faster – better – everywhere.

OM adapter with Connection Cables – SV 9340.720


Date : May 24, 2018

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

OM adapter with Connection Cables – SV 9340.720

created: 24.05.2018 build on www.rittal.com/us-en

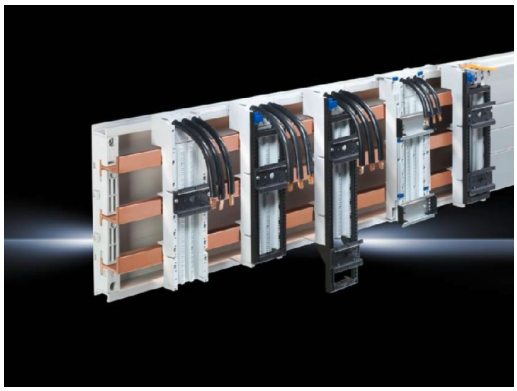

Product description

Material:	Polyamide (PA 6.6) Fire protection corresponding to UL 94-V0
Color:	Chassis: RAL 7035
Note:	The technical data may vary for UL applications.

Product features

Suitable for busbars:	with cross-section height: 5 mm with cross-section height: 10 mm
Number of poles:	3-pole
For bar systems with center-to-center spacing:	60 mm
Dimensions:	Height: 208 mm (8.2 ″) Width: 55 mm (2.2 ″)
Rated operating voltage:	690 V, 3~
Connection cable:	Cross-section: AWG 8 Length: 130 mm (5.1 ″)
Support Frame:	Height: 170 mm (6.7 ″) Width: 55 mm (2.2 ″)

Rated current (max.):	40 A
Number of support rails:	1
Height of support rails:	10 mm (0.39 ″)
Support rail type:	TS 55D
Packaging unit:	1 pc(s).
Weight/packaging unit:	0.36 kg (0.8 lb.)
EAN:	4028177664241
Customs tariff number:	85369095
ETIM 6.0:	EC001531
ETIM 5.0:	EC001531
eCl@ss 8.0/8.1:	27370304
eCl@ss 7.0/7.1:	27370304
eCl@ss 6.0/6.1:	27370304
eCl@ss 5.1/5.1.4:	27370302
Product description (long):	SV OM adaptor, 40 A, 690 V, 3-pole, connection cable AWG 8, WH: 55x208 mm, support frame, support rail TS 55D

Approvals

Approvals:	ABS DNV-GL Lloyds Register of Shipping UL + C-UL
Certificates:	EAC
Declarations:	Declaration of conformity