Rittal – The System.

Faster – better – everywhere.

Component shelf, pull-out 482.6 mm (19") for TS IT, TE – DK 5501.675


Date : May 25, 2018


ENCLOSURES | POWER DISTRIBUTION | CLIMATE CONTROL | IT INFRASTRUCTURE | SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Component shelf, pull-out 482.6 mm (19") for TS IT, TE – DK 5501.675

created: 25.05.2018 build on www.rittal.com/us-en

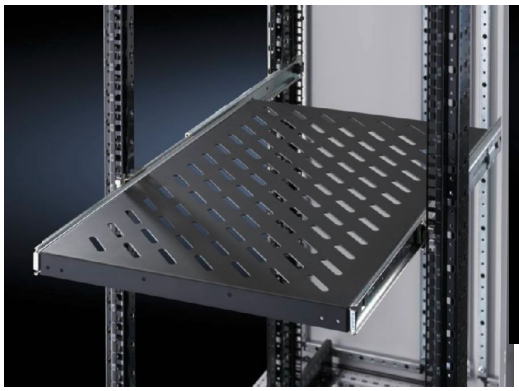

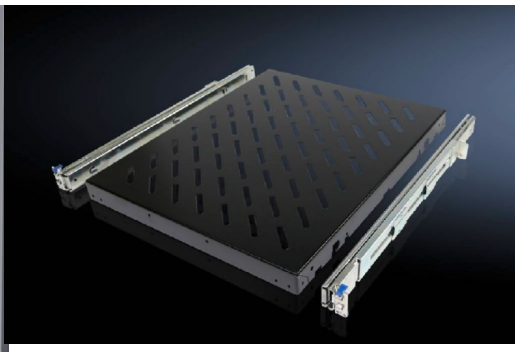

Product description

Description:	For mounting to 19" profile rails or 19" mounting frames between two 19" mounting levels.
Benefits:	Tool-free, time-saving one-person assembly from the front of the enclosure Self-locking Full withdrawal
Applications:	Depth-variable to adapt to individual distances between levels
Material:	Carbon steel
Surface finish:	Base: Spray-finished Telescopic slides/installation kit: zinc-plated
Color:	RAL 9005
Supply includes:	Component shelf, slotted Telescopic slide with mounting kit Assembly components

Product features

Suitable for:	Enclosure type: TS IT Enclosure type: TE
Dimensions:	Width: 419 mm (16 ″) Depth: 500 mm (20 ″)

© Rittal 2018

Distance between levels:	min.: 400 mm (16 ″) max.: 600 mm (24 ″)
Height units:	1 U
Load capacity:	50 kg
Packaging unit:	1 pc(s).
Weight/packaging unit:	6.2 kg (13.7 lb.)
EAN:	4028177679115
Customs tariff number:	73269098
ETIM 6.0:	EC002620
ETIM 5.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 7.0/7.1:	27189261
eCl@ss 6.0/6.1:	27189261
eCl@ss 5.1/5.1.4:	27189218
Product description (long):	DK Component shelf, WHD: 419x1 Ux500 mm, 50 kg, distance between levels: 400-600 mm, Pull-out, RAL 9005

© Rittal 2018