Rittal – The System.

Faster – better – everywhere.

Slide Rails, Static Installation for TS IT – DK 5501.450


Date : May 25, 2018

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Slide Rails, Static Installation for TS IT – DK 5501.450

created: 25.05.2018 build on www.rittal.com/us-en

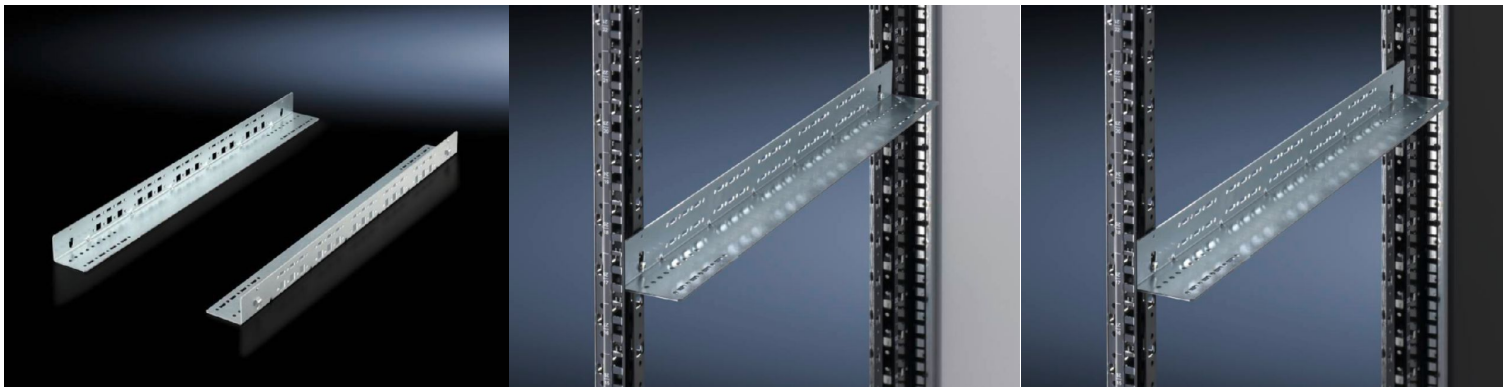

Product description

Description:	Side system punchings to mount accessories and ventilate active components that exhaust air from the side.
Benefits:	Simply attach to the system punchings of the TS-T
Applications:	Mounted between front and rear mounting levels To support heavy installed equipment.
Material:	Carbon steel
Surface finish:	Zinc-plated
Supply includes:	Assembly components
Note:	Effective contact surface 35 mm per side

Product features

Dimensions:	Length: 675 mm (27 ″)
Distance between levels:	745 mm (29 ″)
Contact surface:	Width: 35 mm (1.4 ″)
Height units:	1 U
Load capacity:	80 kg, static load

Packaging unit:	2 pc(s).
Weight/packaging unit:	2 kg (4.4 lb.)
EAN:	4028177679009
Customs tariff number:	73269098
ETIM 6.0:	EC002620
ETIM 5.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 7.0/7.1:	27182590
eCl@ss 6.0/6.1:	27182590
eCl@ss 5.1/5.1.4:	27182504
Product description (long):	DK Slide rail, 1 U, D: 675 mm, 80 kg, static, For two 482.6 mm (19") attachment level (front+rear), distance between levels:: 745 mm, static installation, for 482.6 mm (19") system punchings