GE Lighting

67345 - GE Pulse Start 1-320W PS M132 or 154 Quad(120/208/240/277V)

GEP320MLTAA4-5/2

- Distributor replacement kit contains the appropriate core & coil with color coded leads, a properly rated capacitor and ignitor (if required) and all other components required for ballast replacement
- Precision-wound coils, ensuring even heat dissipation and the highest electrical integrity.
- Magnetic ballast construction ideal for a wide variety of lighting applications.
- Quad ballast (120, 208, 240, 277)

GENERAL CHARACTERISTICS

Ballast Factor	1
Ballast Type	Pulse Start Metal Halide Core and Coil
Capacitor Temp Rating	105 °C
Circuit Type	CWA
Enclosure Type	Core and Coil
Insulation Class	UL Class H 180
Line Voltage Regulation (+/-)	10
Classification (Regulations)	cUL Listed
	UL Listed
Starting Method	Pulse start
Type of Capacitor	Oil filled
Product Technology	High Intensity Discharge
Lamp Wiring	Parallel

PRODUCT INFORMATION

Product Code	67345
Description	GEP320MLTAA4-5/2
Alternative Unit Of Measure	EACH
Standard Package Quantity	3
Ean UPC	043168673457
Standard Package GTIN	00043168673457
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	3
Sales Unit	Each
UCC	043168673457
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168673457
Standard Package GTIN	10043168673454
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168673457

DIMENSIONS

Weight	9.5 lb
Exit Type	

Case Dimensions

Length	5.25in
Width	1.25in

Mounting Dimensions

Mount Length	4.6in
Mount Slot	0.25in

ELECTRICAL CHARACTERISTICS

Capacitance	21
Voltage<Min>	370 V


SAFETY & PERFORMANCE


- cUL_Listed
- UL_Listed

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor (<=)	THD% (<=)	Min. Starting Temp (F/ C)
M154	1	240	370	1.55	1.0	1	0.9			-20
M154	1	120	370	3.1	1.0	1	0.9			-20
M154	1	208	370	1.8	1.0	1	0.9			-20
M154	1	277	370	1.34	1.0	1	0.9			-20
M132	1	120	370	3.1	1.0	1	0.9			-20

M132	1	240	370	1.55	1.0	1	0.9			-20
M132	1	277	370	1.34	1.0	1	0.9			-20
M132	1	208	370	1.8	1.0	1	0.9			-20

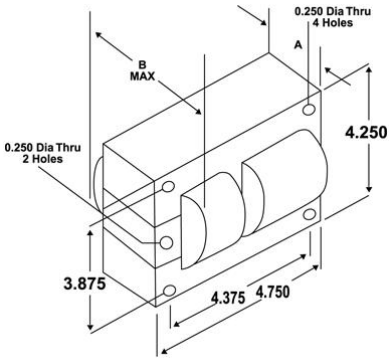

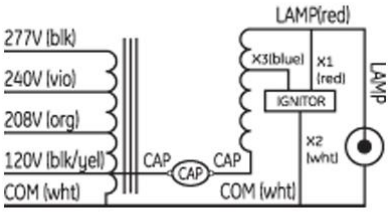

Jul 22, 2017 10:47:11 AM For additional information, visit www.gelighting.com