Product data sheet

Specifications



Enclosed molded case switch, QO, 60A, 2 pole, 240VAC, 22kA, air conditioning, NEMA 3R

QO200TR

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Enclosed molded case switch Weatherproof enclosure
Range of Product	QO

Complementary

Current Rating	60 A
Interrupt Rating	22 kA 240 V AC
Number of Phases	1 phase
Enclosure Rating	NEMA 3R outdoor
Breaker Compatibility	Circuit breaker QO 2P
For Use With	air conditioner
Product Certifications	UL Listed
Indoor/Outdoor Use	Enclosed outdoor
Surface Finish	Baked enamel Gray
Voltage Rating	240 V AC
Ambient Air Temperature for Operation	104 °F (40 °C)
Height	6.5 in (165 mm)
Width	4.6 in (118 mm)
Depth	3.9 in (99 mm)
Product Weight	3.0005 lb(US) (1.361 kg)

Ordering and shipping details

Category	US1DE2A00044
Discount Schedule	DE2A
GTIN	785901535966
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.50 in (8.89 cm)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Width	4.200 in (10.668 cm)
Package 1 Length	6.50 in (16.51 cm)
Package weight(Lbs)	3.0005 lb(US) (1.361 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	7.100 in (18.034 cm)
Package 2 Width	9.800 in (24.892 cm)
Package 2 Length	19.800 in (50.292 cm)
Package 2 Weight	30.351 lb(US) (13.767 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	400
Package 3 Height	42.00 in (106.68 cm)
Package 3 Width	40.0 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	1270.0004 lb(US) (576.062 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**7 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.5 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.1 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**No**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**89**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration

Dimensions

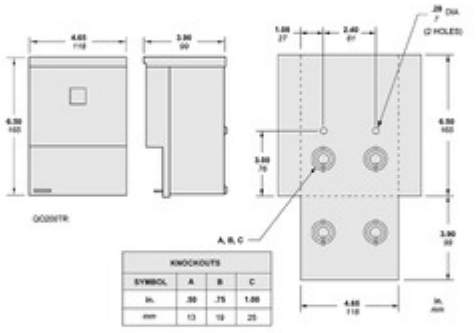

Technical Illustration

Wiring diagram

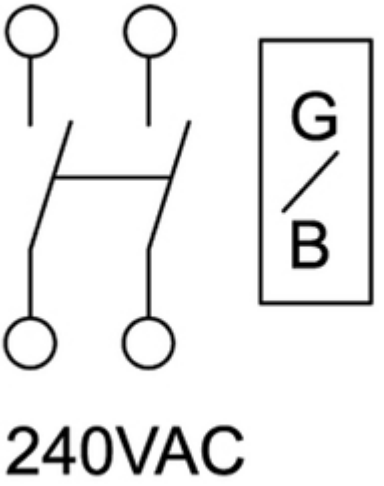


Image of product / Alternate images

Alternative

