Product data sheet
Characteristics

MPZ30T2F
MINI PWR-ZONE DRY 3P 30KVA 480V-208Y/120



Main

Product	Sealed Transformer
Certifications	UL Listed
Type	Mini Power-Zone
Enclosure Code	C
Insulation Temperature	365 °F (185 °C)
Phase	3 phase
Primary Voltage	480 V
Secondary Voltage	208Y/120 V
Full Capacity Taps	2 5 % FCBN
Power Rating	30 kVA
Temperature Rise	115 °C
Winding Material	Copper
Interrupt Rating	18 kA
Circuit Breaker Type	Primary main breaker Secondary main breaker Feeder breaker
Interior Type	QO Load Center interior
Number of Spaces Available	24
Number of Circuits	24
Enclosure Type	NEMA 3R hot-rolled steel

Ordering and shipping details

Category	16275 - MPZ PLUG ON BRANCH CB
Discount Schedule	PE2
GTIN	00785901839002
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	No
Country of origin	US

Packing Units

Package 1 Height	1.67 ft (0.508 m)
Package 1 width	4.00 ft (1.219 m)
Package 1 Length	2.67 ft (0.813 m)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic) and Toluene which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
PVC free	Yes


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Contractual warranty

Warranty	18 months

Dimensions Drawings

Approximate Dimensions

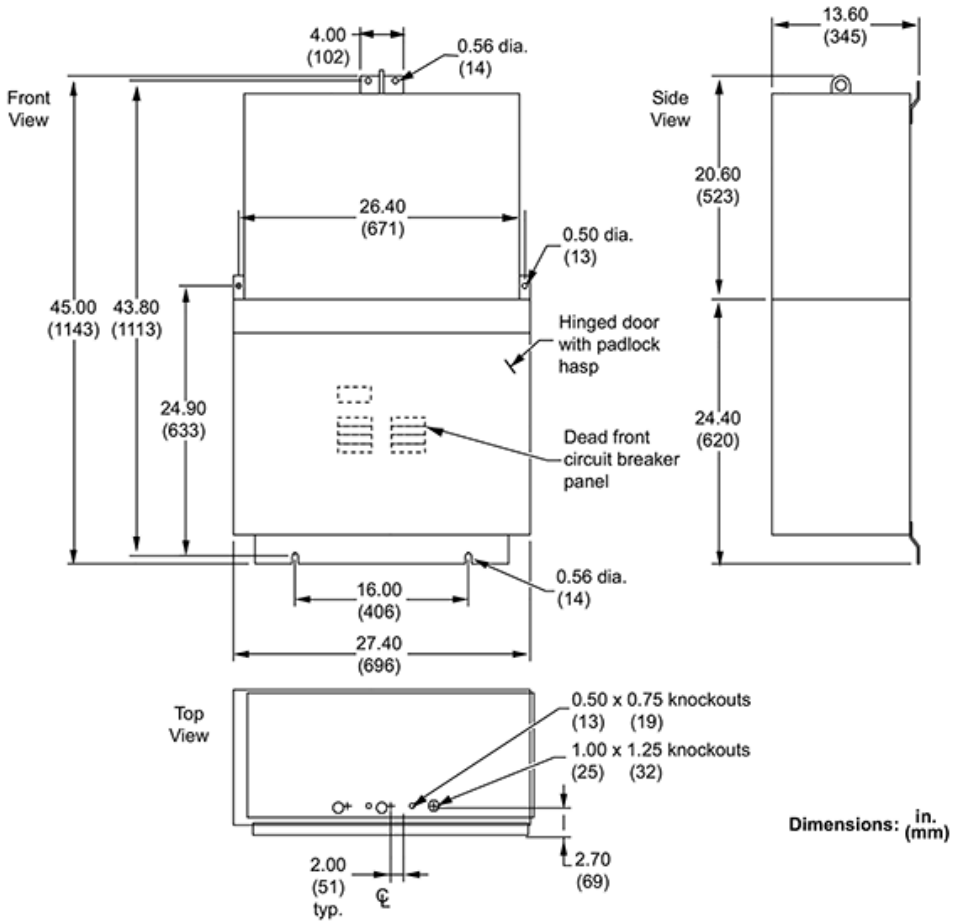

Connections and Wiring Diagrams

