
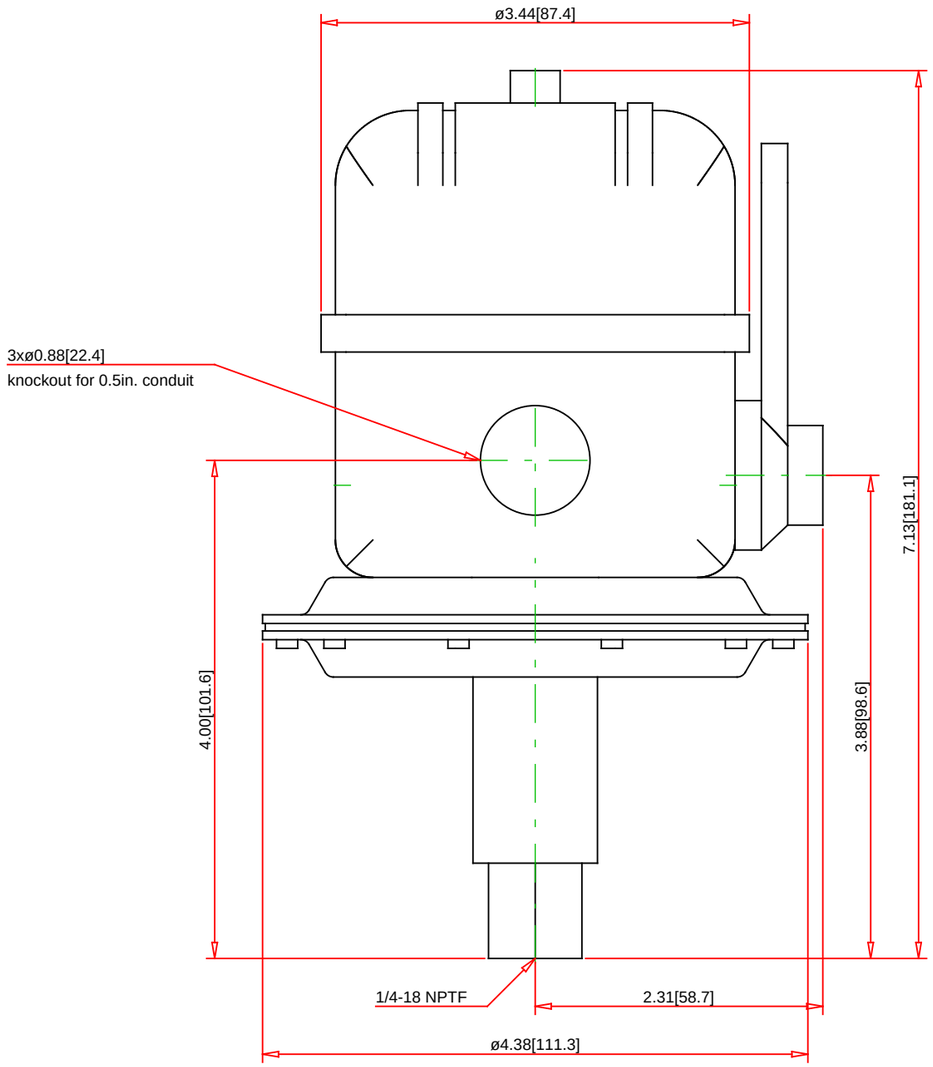


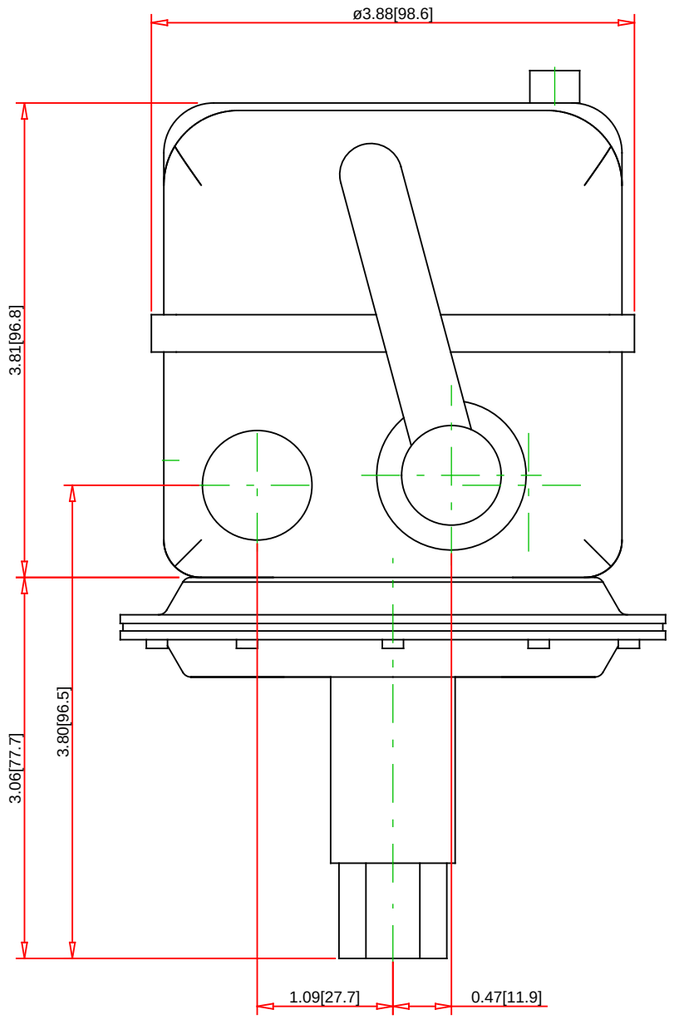

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9016GVG1J09E

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Fluid Characteristics:	Hydraulic oil, noncorrosive liquids, air, noncorrosive gas
Enclosure Rating:	NEMA 1
Certifications:	UL Listed File: E12158 CCN NKPZ - CSA Certified File: LR25490
RoHS:	No
Precision:	+/- 1% of the adjustable range over 1,000,000 operations
Ambient air temp. for operation:	-10 to 185 °F (-23 to 85 °C)
Vibration Resistance:	50 g
Repeat Accuracy:	0.4% of the adjustable range
Operating rate:	<=120 operating cycles per minute
Weight:	4.6 lb

Specification:

Description:	NEMA Square D Vacuum Switches, Power Rated Pressure Switches, 9016GVG
Pressure Range:	Cut-Out Range 5 - 25 (In. of Hg) / Cut-In Range 0 - 20 Hg (In of Hg)
Max. Allowable Pressure:	150 psi
Differential Type:	Adjustable
Output:	DPST
Electrical Connection:	1/2 - 14 NPT Conduit connection
Differential:	5 to 10 in of Mercury
Fluid Connection:	1/4in - 18 NPSF Pressure connection
Actuator Type:	diaphragm
Rated Supply voltage:	480VAC
Continuous Current Rating:	