
Product data sheet

Specifications



Relay, Harmony 8501X, machine tool, coil, 10A resistive at 600V AC, 24V DC, 4NO

8501XDO40V53

Product availability: Stock - Normally stocked in distribution facility

Main

Range	8501X
Relay Type	Control
Product	Relay
Current Rating	10 A AC 5 A DC

Complementary

Coil Voltage	24 V DC
Control circuit voltage limits	Operational 0.8...1.1 Uc DC
Rated breaking capacity	6 A 120 V AC inductive control circuit UL 508 3 A 240 V AC inductive control circuit UL 508 1.5 A 480 V AC inductive control circuit UL 508 1.2 A 600 V AC inductive control circuit UL 508 10 A <= 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC resistive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
[Icm] rated short-circuit making capacity	60 A 120 V AC inductive control circuit UL 508 30 A 240 V AC inductive control circuit UL 508 15 A 480 V AC inductive control circuit UL 508 12 A 600 V AC inductive control circuit UL 508 10 A <= 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC inductive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
Inrush power in W	18 W
Hold-in Power Consumption in W	18 W
Operating time	37 ms - pick-up 21 ms - drop-out
Contact Configuration	4 NO 4 standard contact cartridges
Electrical Connection	Screw clamp terminals
AWG gauge	AWG 18...AWG 12 copper
Tightening torque	Control circuit 9.03…12.04 lbf.in (1.02…1.36 N.m) screw terminals
Mounting Type	Panel
Height	3.56 in (90.42 mm)
Width	2.23 in (56.64 mm)
Depth	5.17 in (131.32 mm)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Operating Temperature	-40…160 °F (-40…71 °C)
Certifications	UL listed file E78403 CCN NKCR CSA LR60905 class 3211 03

Ordering and shipping details

Category	US10CP221157
Discount Schedule	0CP2
GTIN	785901548720
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.500 in (8.890 cm)
Package 1 Width	4.900 in (12.446 cm)
Package 1 Length	9.300 in (23.622 cm)
Package weight(Lbs)	3.380 lb(US) (1.533 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	252
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	851.999 lb(US) (386.460 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**183 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**9 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.2 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.4 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**170 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**3 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again

Repack and remanufacture


Circularity Profile	End of Life Information
Take-back	**No**


Image of product / Alternate images

Alternative





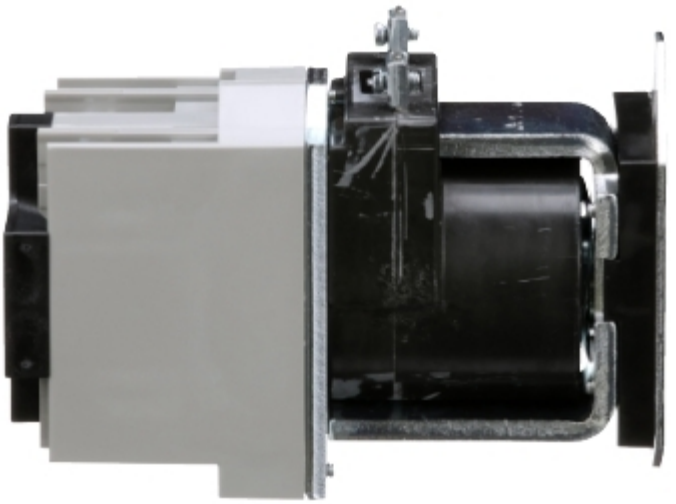

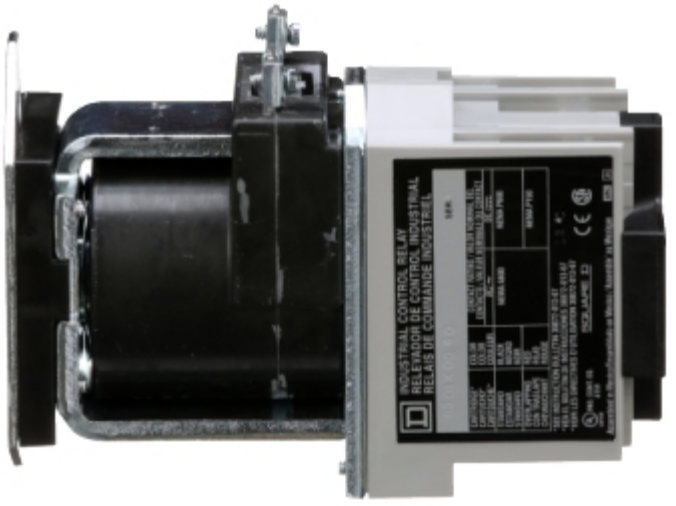
INDUSTRIAL CONTROL RELAY
RELEVADOR DE CONTROL INDUSTRIAL
RELAIS DE COMMANDE INDUSTRIEL