Product data sheet

Specifications



Circuit breaker enclosure, QO, 1 phase, 2 spaces, 100A, NEMA3R, UL

QO2100BNRB

Discontinued on: Apr 30, 2026

To be discontinued

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Enclosure
Range of Product	QO

Complementary

Current Rating	100 A
Interrupt Rating	22 kA
Number of Spaces	2
Maximum Number of Single Pole Circuits	2
Maximum Number of Tandem Breakers	0
Number of Phases	1 phase
Enclosure Rating	NEMA 3R outdoor
Breaker Compatibility	Circuit breaker QO 2P
Product Certifications	UL Listed
Wiring Configuration	3-wire
Electrical Connection	Lugs
Wire Size	AWG 14...AWG 1 copper
Surface Finish	Baked enamel Gray
Busbar Material	Tin plated copper: busbar
Tightening Torque	35 lb.in, AWG 14...AWG 10, copper 35 lb.in, AWG 12...AWG10, aluminium 40 lb.in, AWG 8...AWG 4, aluminium/copper 50 lb.in, AWG 3...AWG 2, aluminium/copper Main lugs 50 lb.in, AWG 3...AWG 1, aluminium/copper
Box Number	10R
Ground Bar	Grounding bar (ordered separately)
Enclosure Material	Welded galvannealed steel
Enclosure Type	Enclosure
Height	13.2 in (335 mm)
Width	6.9 in (176 mm)
Depth	4.12 in (104.65 mm)

Ordering and shipping details

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US1DE2A00005
Discount Schedule	DE2A
GTIN	785901051749
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.000 in (12.700 cm)
Package 1 Width	14.500 in (36.830 cm)
Package 1 Length	7.900 in (20.066 cm)
Package weight(Lbs)	8.091 lb(US) (3.670 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	105
Package 2 Height	41.000 in (104.140 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	885.0002 lb(US) (401.429 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**20 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**18 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.1 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.3 kg CO2 eq.**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**No**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration

Dimensions

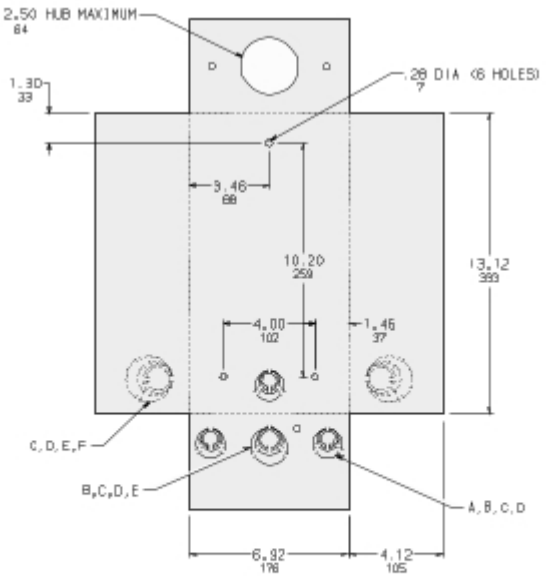


KNOCKOUTS						
SYMBOL	A	B	C	D	E	F
IN	.50	.75	1.00	1.25	1.50	2.00
MM	13	19	25	32	38	51

in.
mm

All dimensions are approximate. See technical documentation.

Technical Illustration

Wiring diagram



120/240VAC

QO2100BNF
QO2100BNS
QO2100BNRB

Image of product / Alternate images

Alternative

