# SLIM15



Color: Bronze

Weight: 2.0 lbs

| | |
|---|---|
| **Project:** | **Type:** |
| **Prepared By:** | **Date:** |

### Driver Info

| | |
|---|---|
| Type | Constant Current |
| 120V | 0.30A/0.21A/0.11A |
| 208V | N/A |
| 240V | N/A |
| 277V | N/A |
| Input Watts | 35.3/24.5/12.7W |

### LED Info

| | |
|---|---|
| Watts | 34/25/13W |
| Color Temp | 5000K |
| Color Accuracy | 85/86/86 CRI |
| L70 Lifespan | 50,000 Hours |
| Lumens | 3,907/2,827/1,493 lm |
| Efficacy | 110.7/115.4/117.6 lm/W |

## Technical Specifications

### Field Adjustability

**Field Adjustable:**
Field Adjustable Light Output:
34/25/13 (factory default 34W)

### Compliance

**UL Listed:**
Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**
Ingress protection rating of IP65 for dust and water

**Trade Agreements Act Compliant:**
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**
This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at designlights.org to confirm the qualification status of a specific SKU prior to specification or purchase.

### Performance

**Lifespan:**
50,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

**Wattage Equivalency:**
34W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

25W: Replaces up to 100W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

13W: Replaces up to 70W Metal Halide (MH) or 50W High Pressure Sodium (HPS)

### LED Characteristics

**LEDs:**
Long-life, high-efficacy, surface-mount LEDs

**Color Consistency:**
7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Construction

**Cold Weather Starting:**
The minimum starting temperature is -40°F (-40°C)

**Maximum Ambient Temperature:**
Suitable for use in up to 104°F (40°C)

**Housing:**
Precision die-cast aluminum / Polycarbonate

**Lens:**
Polycarbonate lens

**Reflector:**
Mirror finish on polycarbonate

**Finish:**
Formulated for high durability and long-lasting color

**Green Technology:**
Mercury and UV free. RoHS-compliant components.

### Installation

**Mounting:**
Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

## Technical Specifications (continued)

### Electrical

**Driver:**
Integrated driver, 60 Hz, 120V:
34W: 0.30A
25W: 0.21A
13W: 0.11A

**THD:**
12.48% at 120V

**Power Factor:**
99.1% at 120V

**Surge Protection:**
4 kV


### Optical

**BUG Rating:**
34W: B2 U0 G1
25W: B1 U0 G1
13W: B1 U0 G0

### Other

**5-Year Limited Warranty:**
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

### Dimensions

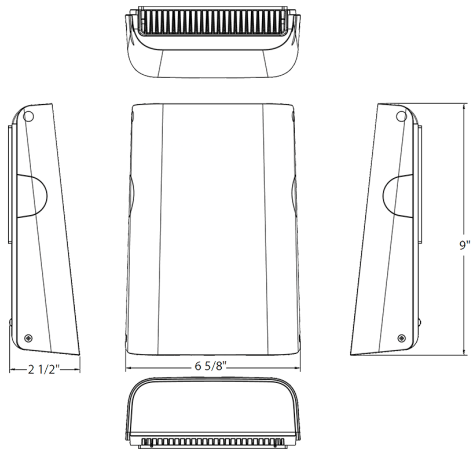


### Features

- Selectable Wattages
- Full cutoff
- 120V
- 5-Year, limited warranty


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

## Ordering Matrix

| Family | Wattage | Color Temp | Finish | Driver |
|---|---|---|---|---|
| SLIM15 | | | | |
| | **Blank =** 34/25/13W | **Blank =** 5000K<br>**N =** 4000K<br>**Y =** 3000K | **Blank =** Bronze<br>**W =** White | **Blank =** 120V |


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice