Product data sheet

Specifications



Load center, QO, 1 phase, 2 spaces, 2 circuits, 30A fixed main lugs, NEMA1, surface cover, consumer pack

QO2L30SCP

Product availability: Stock - Normally stocked in distribution facility

Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Surface cover
Installation Orientation	Vertical
Type of Packing	Bulk

Complementary

Tightening Torque	Main lugs 35 lb.in, AWG 14...AWG 10, aluminium/copper Main lugs 35 lb.in, AWG 12...AWG10, aluminium/copper
PoN Convertible Mains (lugs)	Fixed Mains (lugs)
Rated Current	30 A
Number of Spaces	2
Max Short Circuit Current Rating	10 kA
Maximum Number of Single Pole Circuits	2
Maximum Number of Tandem Breakers	0
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 12...AWG10 aluminium AWG 16...AWG 10 copper
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Lugs
Busbar Material	Tin plated aluminium: busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	1
Height	6.7 in (171 mm)
Width	3.8 in (97 mm)
Depth	3.1 in (79 mm)
Product Weight	2.035 lb(US) (0.923 kg)

Environment

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Enclosure Rating	NEMA 1 indoor enclosure
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

Ordering and shipping details

Category	US10CPQ01303
Discount Schedule	0CPQ
GTIN	047569804328
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.200 in (10.668 cm)
Package 1 Width	4.400 in (11.176 cm)
Package 1 Length	7.500 in (19.050 cm)
Package weight(Lbs)	32.559 oz (923.060 g)
Unit Type of Package 2	PAL
Number of Units in Package 2	388
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	814.999 lb(US) (369.677 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**8 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**4 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.3 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**4 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**90**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration

Dimensions

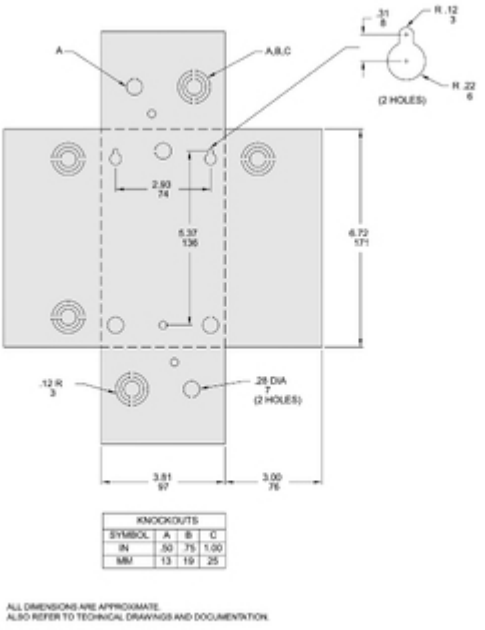

Technical Illustration

Wiring diagram

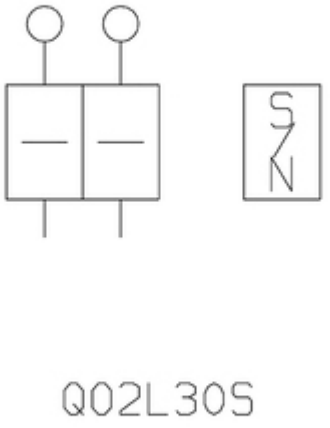


Image of product / Alternate images

Alternative












QO™ Load Center / Centre de carga QO™
1
2