Product data sheet

Specifications



communication module DeviceNet, Altivar, 500kbps, 1 removable 5 way screw connector

VW3A3609

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Altivar
Product or Component Type	Communication module

Complementary

Range compatibility	Altivar Process Modular Altivar 32 Altivar Process ATV600 Altivar Machine ATV340 except Sercos drives Altivar Process ATV900 Altivar Machine ATV320
Communication Port Protocol	DeviceNet
Electrical connection	1 connector 1 removable 5-way screw connector
Transmission Rate	125 kbps, 250 kbps and 500 kbps configurable
Maximum cable distance between devices	328.08 ft (100 m) 500 kbps 1640.4 ft (500 m) 125 kbps
Addressing	1...63 configurable by graphic terminal/SoMove software
Communication service	Inputs : polled, change of state, cyclic Outputs : polled ODVA AC drive and CiA 402 profile Auto device replacement Communication monitoring time out adjustable by DeviceNet configurator
Display type	1 LED MS (Module Status) 1 LED NS (Network Status)
diagnostic function	Control mode received by graphic terminal Received instruction by graphic terminal
Bus profile	CIP AC Drive CiA 402
Product Weight	0.7 lb(US) (0.3 kg)

Ordering and shipping details

Category	US1CP4B22152
Discount Schedule	CP4B
GTIN	3606480198991
Returnability	Yes
Country of origin	SE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Height	1.850 in (4.700 cm)
Package 1 Width	2.441 in (6.200 cm)
Package 1 Length	3.504 in (8.900 cm)
Package weight(Lbs)	2.363 oz (67.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	100
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	15.648 lb(US) (7.098 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	2a2f2e41-9976-44a1-aaef-cecaebe1de88
EU RoHS Directive	Compliant
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension

Repair	No

Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No


Image of product / Alternate images

Alternative







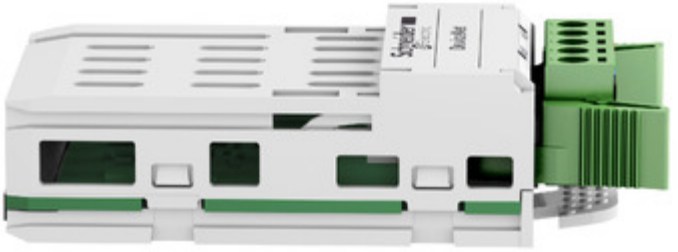


Schneider
Electric
DeviceNet


VW3A3619
DeviceNet
6W1004