GARD-N-POST™

SUPPORTS & ENCLOSURES

Arlington









FOR OUTDOOR INSTALLATIONS • UL/CSA LISTED



Look Great OUTDOORS!

UL/CSA LISTED SUPPORTS & ENCLOSURES

GARD-N-POST™

Arlington's **Gard-N-Posts**™ are the attractive, safe and easy way to install light fixtures and devices outdoors!

We offer a variety of styles, from 9" to 73" tall that function as supports or enclosures – or both!

Made of non-metallic, heavy-duty plastic, our damage-resistant Gard-N-Post holds up against abuse from lawn maintenance equipment.

Most have built-in stabilizers that deliver rigid support and require no assembly. The angle-cut at the bottom allows for easy access to underground wires (Not applicable to GPD9 deck/post mount style or the GPLN15GR low profile support.)

Plus, the colorant runs throughout the post, so there's no chipping or loss of color.



Four permanent colors. No chipping!

For added convenience, **GP19, GP26** and **GP37**, *our most popular sizes*, come with a supplied separator so you can install power and low voltage outlets in the same post.

GP19 • GP26 • GP37
One post. Two openings.

Some styles come with a metal grounding bushing in place, ready for the installation of an NPT fixture. And some have KOs that make them UL Listed enclosures.



Whatever your need, there's a Gard-N-Post to fit!

Arlington

CSA Listed with grounding lugs

Patented. Other patents pending.

800.233.4717 • www.aifittings.com • EMAIL sales@aifittings.com

For Any Outdoor Application

USES		HEIGHT • CATALOG NO.		
Supports for fixture(s) and/or GFCI	page 4	19.5" GP19 26" GP26		
Bollard Kit Support ▶ for fixture and/or GFCI	page 8	28" GPBK28 35" GPBK35		
Super Tall Support for fixture and/or GFCI	page 6	37" GP37 ▶ Optional 18" extender GPX18		
Low Profile Supports *with bushing* for 2- and 3-wire light fixtures	page 10	19.5" GPLN19 15" GPLN15GR ▶ 19.5" GPL19	 	
Low Profile Enclosure with built-in weatherproof while-in-use cover	page 11	19.5" GPD19		
Deck/Post Mount Support for fixture and/or GFCI	page 7	9" GPD9		
3-wire type **Light Fixtures** for use with GARD-N-POST™	page 12	Decorative Lighting GPI75B, GP175BR Pagoda-style Lighting GPP60B, GPP60LB, GPP60LB, GPP60LBR		

GARD-N-POST™ Low Profile Support

FOR ANY OUTDOOR LIGHT FIXTURE UP TO 18 LBS

GP19 19.5"
GP26 26"

- Openings on both sides of the post allow for back-to-back power – use the supplied low voltage separator to install power and low voltage outlets in the same post
- Built-in stabilizers require no assembly and deliver rigid support
- Designed for easy access to underground wiring
- Four 1/2" KOs for a UL Listed enclosure
- For any outdoor light fixture up to 18 lbs, with 1/2" or 3/4" NPT threads, and/or a GFCI wiring device
- Four colors
- Competitively priced



GP19



UL Listed cover
Removable for easy wire installation

GP26

Taller design provides additional height for wiring devices and increased burial depth

Built-in stabilizers
No loose parts.
No assembly required.

Angle-cut base
for easy access to underground wiring







Patented.
Other patents pending.

GP19 19.5" Height

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GP19B	77086	Black	1	6
GP19BR	77087	Bronze	1	6
GP19G	77088	Green	1	6
GP19W	77089	White	1	6

Note: Add suffix 'GC' for orders in Canada

GP26 26" Height

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GP26B	77090	Black	1	6
GP26BR	77092	Bronze	1	6
GP26G	77094	Green	1	6
GP26W	77096	White	1	6

Note: Add suffix 'GC' for orders in Canada

Includes:
Installed 3/4" x 1/2" NPT metal reducing bushing, locknut with copper ground wire for fixture installation, (2) blank device plates, gaskets and screws, plug for top hole (when fixture is not installed), low voltage separator, removable KO plate.

For Light Fixture(s) and/or a GFCI



Power

Install one or two GFCIs with weatherproof cover...



Low Voltage

add the supplied separator...



for low voltage on one side, power on the other



CSA Listed with grounding lugs

Arlington

GARD-N-POST™ Two-piece Super Tall 37" Support

OUR TALLEST SUPPORT FOR MOST OUTDOOR LIGHT FIXTURES

GP37 37"

Optional

GPX18 18" Extender

Our tallest Gard-N-Post supports most outdoor light fixtures, and/or a GFCI wiring device.

- Adaptable in the field for time clocks and disconnects
- Openings on both sides of the post and the low voltage separator (supplied) allow for low voltage on one side, power on the other.
- Built-in stabilizers
- Two 1/2" KOs for a UL Listed enclosure
- Non-chipping colors
- UV rated plastic

Add the GPX18 (optional) to extend the GP37 in 18" increments, up to 73" tall. Or cut the top of the extender to the desired height.



GP37

Our tallest 2-piece Gard-N-Post assembles with PVC cement

Extend the height of GP37 up to 73"

GPX18 Optional 18" Extender







GP37 37" Height

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GP37B	76153	Black	1	4
GP37BR	76154	Bronze	1	4
GP37G	76156	Green	1	4
GP37W	76155	White	1	4

Note: Add suffix 'GC' for orders in Canada

Includes:
Installed 3/4" x 1/2" NPT metal reducing bushing, locknut with copper ground wire for fixture installation, (2) blank device plates, gaskets and screws, plug for top hole (when fixture is not installed), low voltage separator and removable KO plate.

OPTIONAL **GP18X 18" Extender**

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPX18B	76157	Black	1	4
GPX18BR	76158	Bronze	1	4
GPX18G	76160	Green	1	4
GPX18W	76159	White	1	4

Two-piece Deck/Post Mount Support GARD-N-POST™

LOW PROFILE • MOUNTS LIGHT FIXTURES ON DECK OR POST



GPD9 9"

This low profile 9" support is ideal for mounting most light fixtures and/or a GFCI wiring device on a deck or post.

- Non-metallic two-piece design
- UV rated plastic for long outdoor life
- Metal grounding bushing assembly included
- Two 1/2" KOs for a UL Listed enclosure
- Includes plug for top for device-only installations
- Four permanent colors
- UL and CSA Listed (CSA w/ grounding lug)
- Competitively priced!



GP9
Two-piece
Gard-N-Post





Four permanent colors.
No chipping!

Look Great OUTDOORS!

See back for Light Fixture details

CSA Listed with grounding lugs

GPD9 9" Height

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPD9B	76161	Black	1	6
GPD9BR	76162	Bronze	1	6
GPD9G	76164	Green	1	6
GPD9W	76163	White	1	6

Note: Add suffix 'GC' for orders in Canada

Includes:
Installed 3/4" x 1/2" NPT metal reducing bushing, locknut with copper ground wire for fixture installation, blank device plate, gasket and screws, plug for top hole (when fixture is not installed), removable KO plate and mounting base.

Arlington

GARD-N-POST™ Low Cost Bollard Kits

SUPPORT POST WITH PAGODA LIGHT FIXTURE

GPBK28 28"

GPBK35 35"

- Perfect for decks, boat docks and concrete walkways
- Square pagoda-style light fixture matches the Gard-N-Post's shape
- Standard lamp socket in the fixture accommodates a variety of lamp types
- Back-to-back openings in the post, and the low-voltage separator give you the option of installing power in one side, and low-voltage in the other or high voltage devices in both
- Two combination KO plates provide a UL Listed enclosure
- Non chipping colors: black, bronze
- Low cost bollard in two sizes!
- Easy installation– includes everything you need to install it, except anchor bolts and caulking



1 Attaches easily to surface

Easy to install!



2 The non-metallic Gard-N-Post slides over the metal support post as shown at right.

Both posts are held firmly in place with the supplied screws (see above).





3 Place decorative curb over Gard-N-Post. Slide it down to cover the installation.



4 Press fit spacer to base of lamp.



5 Install pagoda light to post with locknut *inside* the top of the post. Wire fixture.

Recommended anchors (not included): Concrete: (4) 3/8" x 2-1/2" Tapcons®
Cast-in-place concrete: (4) 3/8" anchor bolts • Wood deck: (4) 3/8" anchor bolts w/ nuts & washers

Bollard Kit 28" and 35" Heights

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR/ HEIGHT	UNIT PKG	STD PKG
GPBK28B*	76090	Black, 28"	1	1
GPBK35B	77040	Black, 35"	1	1
GPBK35BR	77041	Bronze, 35"	1	1

Note: Add suffix 'GC' for orders in Canada
*Does not include Pagoda Light Fixture

Kit includes:
Gard-N-Post and metal stabilizer, curb, pagoda light fixture and decorative spacer, (2) blank device plates with gaskets and screws, low voltage separator and removable KO plate with screws.

*GPBK28B comes with an In-And-Out cover instead of the pagoda light fixture

Sold separately

Pagoda Light Fixture complements Arlington's Gard-N-Post line

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPP60LB	77046	Black	1	1
GPP60LBR	77047	Bronze	1	1

Fixture uses a 40 watt halogen, 40 watt incandescent, or a 13 watt flourescent lamp. Lamp not included.

LOOKS GREAT A SQUARE LIGHT ON A SQUARE POST



Perfect for Concrete Walkways and Boat Docks!





GPBK28
28" Bollard kit

GPBK35
with pagoda light

CSA Listed with grounding lugs

Arlington

GARD-N-POST™ Low Profile Support

JUST FOR 2- AND 3-WIRE LIGHT FIXTURES • LOW COST

GPLN19 19.5"

GPL19 19.5"

GPLN15GR 15"

Installing a 2- or 3-wire outdoor light fixture is easier, and less expensive with Arlington's low cost Gard-N-Posts.

The GPLN series low profile support is designed for 3-wire light fixtures. It comes with a 3/4" NPT threaded opening, and an installed 3/4 x 1/2 non-metallic reducing bushing for use with 1/2" or 3/4" NPT fixtures.

- Installed cover
- Permanent colors – No chipping
- Heavy-duty – Resists damage from lawn mowers and other lawn maintenance equipment
- UV rated plastic for long outdoor life
- UL and CSA Listed



GPLN19
Non-metallic bushing
for 3-wire fixtures only



GPL19
Metal bushing *with ground wire for 2- or 3-wire fixtures*

Our Absolutely LOWEST COST Gard-N-Post



GPLN15GR
Non-metallic bushing
for 3-wire fixtures only



GPLN19 19.5" Height • Non-Metallic Bushing

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPLN19B	76190	Black	6	6
GPLN19BR	76192	Bronze	6	6

GPLN15GR 15" Height • Non-Metallic Bushing

GPLN15GR	76181	Gray	10	

GPLN19 & GPLN15GR Include: Access panel cover, gasket, 3/4" x 1/2" NPT non-metallic bushing for fixture installation.

Note for all: Add suffix 'GC' for orders in Canada

GPL19 19.5" Height • Metal Bushing

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPL19B	77000	Black	1	6
GPL19BR	77001	Bronze	1	6
GPL19G	77002	Green	1	6
GPL19W	77003	White	1	6

Includes: Access panel cover, gasket, installed 3/4" x 1/2" NPT metal grounding bushing and locknut with copper ground wire for fixture installation.

Low Profile Enclosure

GARD-N-POST™

WITH EXTRA DUTY WEATHERPROOF IN USE COVER





GPD19 19.5"

Arlington's low profile GPD19 Gard-N-Post enclosure costs about the same as multiple piece assemblies, but it looks a lot better, and installs faster and easier.

- Ships with a **clear extra-duty weatherproof in-use cover**, GFCI and duplex wall plate – no gasket required
- Four permanent, damage-resistant colors
- Made of heavy-duty, UV-rated plastic
- 19.5" tall
- UL Listed enclosure – Meets 2014 NEC extra-duty code requirements

Features for EXTRA-DUTY Code Compliance



GPD19

Extra-Duty Built-in Weatherproof Cover

Reinforced Hinge allows cover to comply with extra-duty code requirements of 2014 NEC

UL Listed Enclosure





Why install boxes like this?...when you can

Look Great OUTDOORS!

GPD19 19.5" Height

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	UNIT PKG	STD PKG
GPD19B	77020	Black	1	6
GPD19BR	77021	Bronze	1	6
GPD19G	77022	Green	1	6
GPD19W	77023	White	1	6

Includes: Gard-N-Post with built in weatherproof while-in-use cover, GFCI wall plate

CSA Listed with grounding lugs

Arlington

GARD-N-POST™ Decorative Light Fixtures

3-WIRE LANDSCAPING & PAGODA STYLE • SOLD SEPARATELY

Decorative 3-wire type light fixtures

- Powder coated color match
- For heavy-duty commercial or residential use
- 1/2" NPT fixture
- Adds safety and security
- Perfect for illuminating signs, flagpoles, walkways, buildings, driveways, yards and recreational areas

Lamp Up to 75 watt, flood

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	KO SIZE	DIM A	DIM B	DIM C	UNIT PKG	STD PKG
GPI75B	77042	Black	1/2"	4.062	4.062	8.135	1	4
GPI75BR	77043	Bronze	1/2"	4.062	4.062	8.135	1	4

Uses a 75 watt PAR 16 or a 50 watt PAR 20 halogen lamp. Lamp not included.





Pagoda-style, 3-wire type light fixture

- Durable cast aluminum
- 3/4" NPT fixture
- Made for incandescent, halogen and energy-saving compact fluorescent lamps (Lamps not included)




Lamp Incandescent, halogen or compact fluorescent

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	DIM A	DIM B	DIM C	UNIT PKG	STD PKG
GPP60B	77046	Black	4.750	4.750	8.750	1	4
GPP60BR	77047	Bronze	4.750	4.750	8.750	1	4

Uses a 40 watt halogen, 40 watt incandescent, or 13 watt fluorescent lamp. Lamp not included.

GPP60B

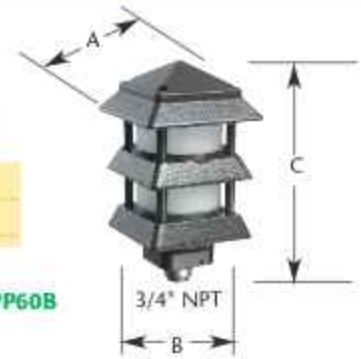

Lamp Incandescent, halogen or compact fluorescent

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	COLOR	DIM A	DIM B	DIM C	DIM D	UNIT PKG	STD PKG
GPP60LB	04605	Black	3.600	4.250	6.070	8.573	1	4
GPP60LBR	04606	Bronze	3.600	4.250	6.070	8.573	1	4

Uses a 40 watt halogen, 40 watt incandescent, or 13 watt fluorescent lamp. Lamp not included.

GPP60LB



Arlington

Patented/Other patents pending

Distributed by

1 Stauffer Industrial Park. Scranton, PA 18517
800.233.4717 • www.aifittings.com • EMAIL sales@aifittings.com

©2005, 2006 Arlington Industries Inc. GP0518/25M